


MGDL40227-MKX8(全灯)  
 器具全光束:6390lm  
 ランプ:LDL40S・N/22/34/PC


### 配光曲線図

光度 cd/1000lm

— A-A  
 — B-B  
 — C-C

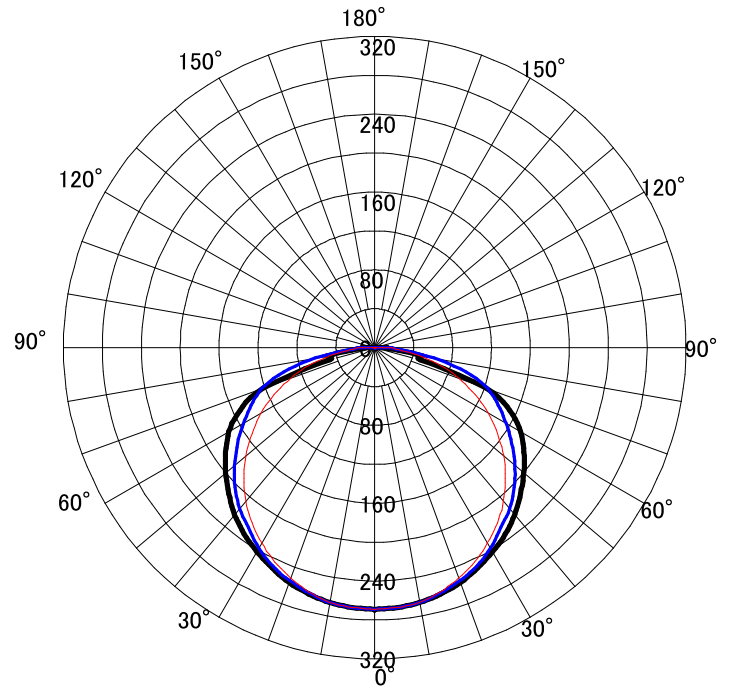

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	12	16	16
-80°	50	46	62
-70°	122	92	124
-60°	173	135	156
-50°	200	173	188
-40°	224	206	216
-30°	242	232	238
-20°	257	252	255
-10°	266	266	266
0°	269	269	269
10°	266	266	266
20°	257	252	255
30°	242	232	238
40°	224	206	216
50°	200	173	188
60°	173	135	156
70°	122	92	124
80°	50	46	62
90°	12	16	16

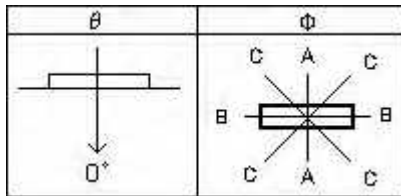

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.33 H	良	中	否
DN 90.8 %	B-B 1.28 H	81	81	71

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数	照明率 U ( × 0.01 )																							
0.6	41	32	27	39	31	26	40	32	27	38	31	26	39	31	26	37	31	26	31	26	31	26	24	
0.8	51	42	36	48	41	35	50	42	36	48	40	35	48	41	35	46	40	35	40	35	40	35	33	
1.0	60	51	44	56	48	43	59	50	44	55	48	43	56	49	43	53	47	42	47	42	47	42	40	
1.25	68	59	53	63	56	50	67	58	52	62	55	50	64	57	51	60	54	50	55	50	54	50	47	
1.5	75	66	59	68	61	56	73	65	59	67	61	56	69	62	57	65	59	55	60	56	59	55	52	
2.0	84	76	69	75	69	64	81	74	68	74	68	64	77	71	66	72	67	63	68	64	67	63	60	
2.5	90	82	77	79	74	70	87	81	75	78	73	70	82	77	73	76	72	69	74	70	72	69	65	
3.0	94	88	82	82	78	74	91	86	81	81	77	74	86	81	77	79	76	73	78	75	76	73	69	
4.0	100	95	90	87	83	80	97	92	88	85	82	79	91	87	84	83	81	78	83	80	81	78	74	
5.0	104	99	95	89	86	83	100	96	92	88	85	83	94	91	88	86	83	81	86	84	83	81	77	