


MEDL40226-MKX8(全灯)  
 器具全光束:6400lm  
 ランプ:LDL40S・N/22/34/PC


### 配光曲線図

光度 cd/1000lm

— A-A  
 — B-B  
 — C-C

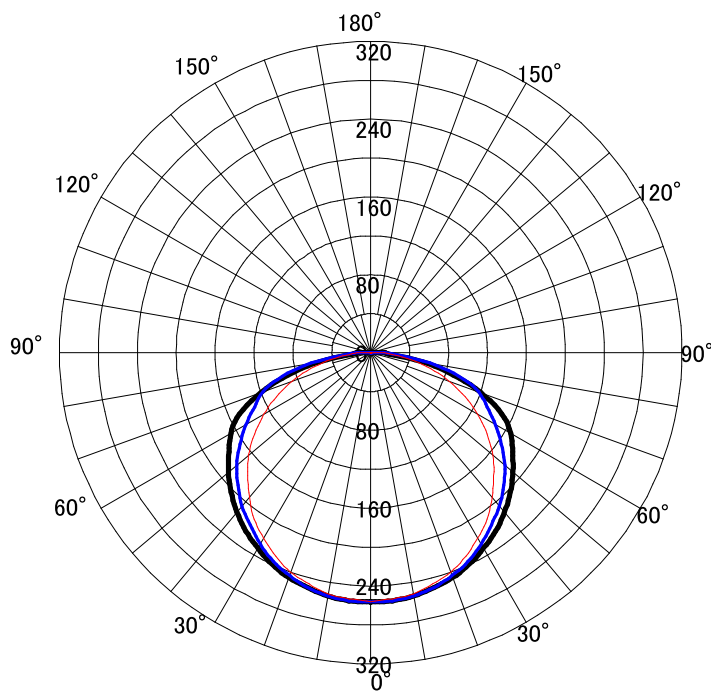

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	14	13	14
-80°	53	42	62
-70°	120	86	118
-60°	166	127	148
-50°	191	164	180
-40°	214	194	206
-30°	232	220	227
-20°	246	240	244
-10°	254	252	254
0°	256	256	256
10°	254	252	254
20°	246	240	244
30°	232	220	227
40°	214	194	206
50°	191	164	180
60°	166	127	148
70°	120	86	118
80°	53	42	62
90°	14	13	14

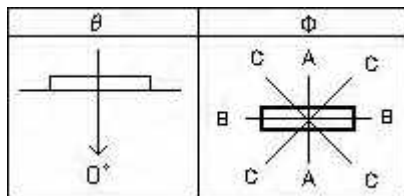

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.33 H	良	中	否
DN 87.8 %				
DN 87.5 %	B-B 1.28 H	81	81	71

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10				30		10				30		10				30		10		0
室指数	照明率 U ( × 0.01 )																							
0.6	39	31	25	37	30	25	38	31	25	37	30	25	37	30	25	36	29	25	29	25	29	25	23	
0.8	49	41	35	46	39	34	48	40	34	46	39	34	46	39	34	44	38	33	38	34	38	33	31	
1.0	57	49	42	53	46	41	56	48	42	53	46	41	54	47	41	51	45	40	45	41	45	40	38	
1.25	66	57	50	60	53	48	64	56	50	59	53	48	61	54	49	58	52	48	53	48	52	48	45	
1.5	72	63	57	65	59	54	70	62	56	64	58	53	66	60	55	62	57	53	58	54	57	53	50	
2.0	81	73	67	72	67	62	78	72	66	71	66	62	74	69	64	69	65	61	66	62	65	61	58	
2.5	87	80	74	77	72	68	84	78	73	76	71	68	80	75	70	74	70	67	72	68	70	67	64	
3.0	92	86	81	80	76	73	89	83	79	79	76	72	84	80	76	77	74	71	76	73	74	71	68	
4.0	98	93	89	85	82	79	95	90	87	84	81	78	89	86	83	82	79	77	82	79	79	77	74	
5.0	101	97	94	87	85	83	98	95	91	86	84	82	92	90	87	84	82	81	85	83	82	81	77	