


MEDL40225-MKX8(全灯)
 器具全光束:6180lm
 ランプ:LDL40S・N/22/34/PC


配光曲線図

光度 cd/1000lm

— A-A
 — B-B
 — C-C

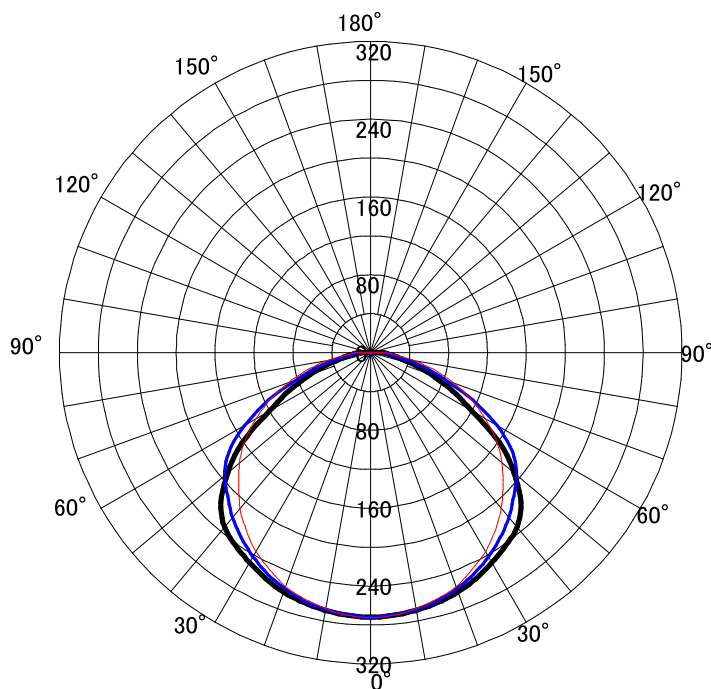

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	12	14	14
-80°	28	43	33
-70°	66	90	81
-60°	120	136	150
-50°	192	176	196
-40°	234	209	221
-30°	249	236	242
-20°	262	256	258
-10°	269	267	268
0°	272	272	272
10°	269	267	268
20°	262	256	258
30°	249	236	242
40°	234	209	221
50°	192	176	196
60°	120	136	150
70°	66	90	81
80°	28	43	33
90°	12	14	14

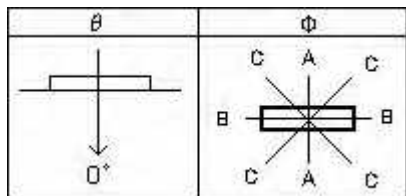

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.36 H	良	中	否
DN 86.5 %				
DN 86.1 %	B-B 1.29 H	81	81	71

反射率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
		床	30		10		30		10		30		10		30		10		30		10		0		
室指数		照明率 U (× 0.01)																							
0.6		40	32	27	38	31	27	39	32	27	38	31	26	38	31	27	37	31	26	31	26	31	26	24	
0.8		50	42	36	47	40	35	49	42	36	47	40	35	48	41	36	45	40	35	40	35	40	35	33	
1.0		58	50	44	54	48	42	57	49	44	53	47	42	55	48	43	52	46	42	47	42	46	42	40	
1.25		66	58	52	60	54	49	64	57	51	60	54	49	62	55	50	58	53	48	53	49	53	48	46	
1.5		71	63	57	65	59	54	70	62	57	64	58	54	66	60	55	62	57	53	58	54	57	53	51	
2.0		80	72	66	71	66	61	77	71	65	70	65	61	73	68	63	68	64	60	65	61	64	60	57	
2.5		85	78	72	75	70	66	82	76	71	74	70	66	78	73	69	72	68	65	70	66	68	65	62	
3.0		89	83	77	78	74	70	86	81	76	77	73	70	81	77	73	75	71	69	73	70	71	69	65	
4.0		94	89	84	81	78	75	91	86	82	80	77	74	86	82	78	78	76	73	78	75	76	73	70	
5.0		97	93	88	83	80	78	94	90	86	82	80	77	88	85	82	80	78	76	80	78	78	76	72	