


MGDL40127-MKX8(全灯)
 器具全光束:3260lm
 ランプ:LDL40S・N/22/34/PC


配光曲線図

光度 cd/1000lm

— A-A
 — B-B
 — C-C

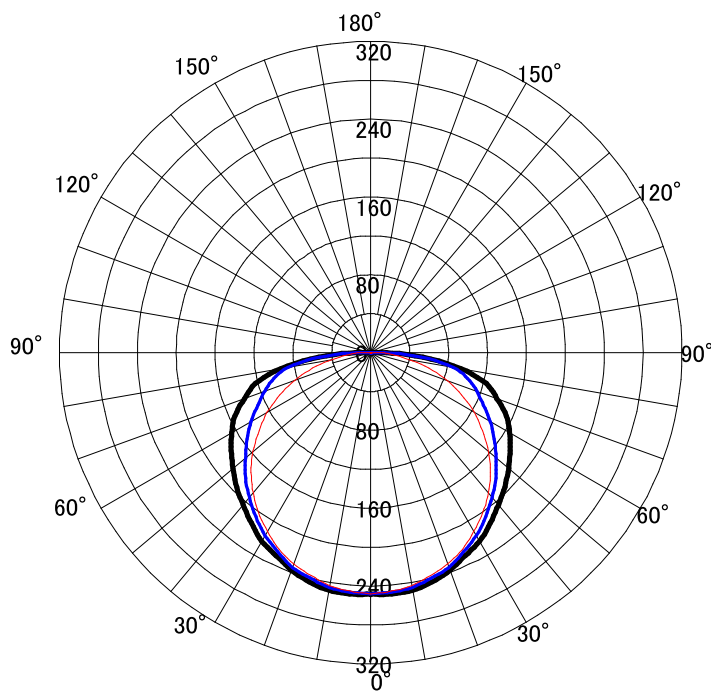

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	16	12	15
-80°	94	40	86
-70°	138	83	116
-60°	165	123	142
-50°	185	158	168
-40°	204	188	194
-30°	224	212	217
-20°	238	231	235
-10°	248	243	245
0°	248	248	248
10°	248	243	245
20°	238	231	235
30°	224	212	217
40°	204	188	194
50°	185	158	168
60°	165	123	142
70°	138	83	116
80°	94	40	86
90°	16	12	15

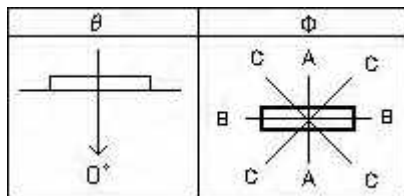

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.35 H	良	中	否
DN 89.7 %				
DN 89.3 %	B-B 1.27 H	81	81	71

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数	照明率 U (× 0.01)																							
0.6	39	30	25	37	30	24	38	30	25	36	29	24	37	29	24	35	29	24	29	24	29	24	22	
0.8	49	40	34	46	38	33	48	39	33	45	38	33	46	38	33	44	37	32	37	32	37	32	30	
1.0	57	48	41	53	45	40	56	47	41	52	45	40	53	46	40	50	44	39	45	39	44	39	37	
1.25	65	56	49	60	52	47	63	55	49	59	52	47	60	53	48	57	51	46	52	47	51	46	44	
1.5	71	62	56	65	58	52	69	61	55	64	57	52	66	59	54	62	56	52	57	52	56	52	49	
2.0	81	73	66	72	66	61	78	71	65	71	65	61	74	68	63	69	64	60	65	61	64	60	57	
2.5	87	80	74	77	72	67	84	78	72	76	71	67	80	74	70	74	70	66	71	67	70	66	63	
3.0	92	86	80	81	76	73	89	84	79	80	76	72	84	80	76	78	74	71	76	73	74	71	68	
4.0	99	94	89	86	82	80	96	91	87	85	82	79	90	87	83	83	80	78	82	80	80	78	74	
5.0	103	99	95	89	86	84	100	96	93	87	85	83	94	91	88	85	83	82	86	84	83	82	78	