


型番: DRGE17H03(MP)G/ND-PJX8


配光曲線図

光度 cd/1000lm

— A-A
— B-B
— C-C

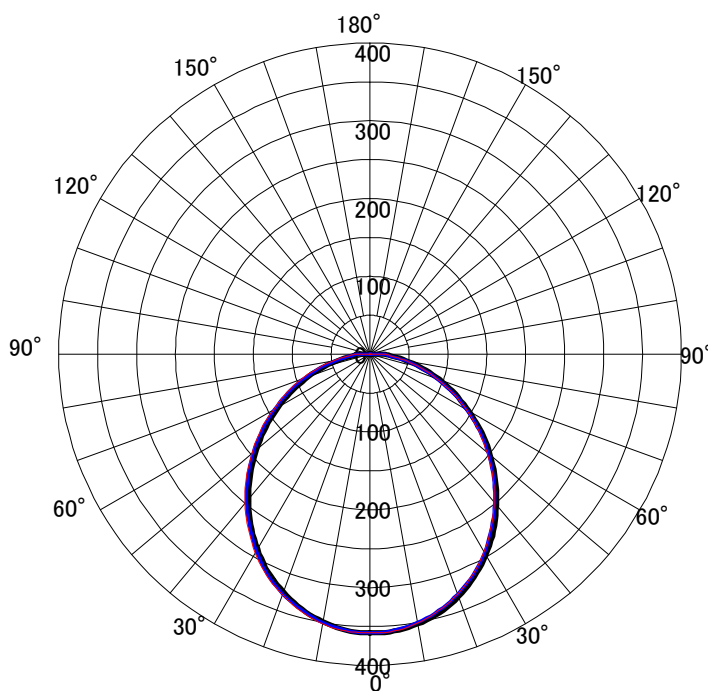

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	17	18	17
-80°	38	47	42
-70°	84	94	90
-60°	136	144	142
-50°	190	198	196
-40°	242	250	247
-30°	289	295	292
-20°	325	329	328
-10°	349	352	350
0°	358	358	358
10°	352	351	350
20°	332	328	328
30°	298	293	294
40°	253	248	249
50°	202	196	198
60°	147	143	144
70°	95	91	91
80°	47	45	44
90°	17	18	17

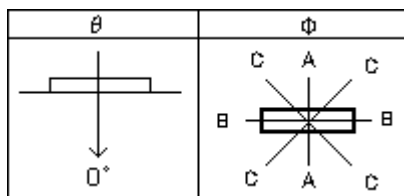

器具効率	最大取付間隔	保守率		
UP 0.0 %	A-A 1.23 H	良	中	否
100.0 %				
DN 100.0 %	B-B 1.21 H	83	81	79

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10				30			10			30			10			30		10	
室指数		照明率 U (× 0.01)																						
0.6		48	39	33	45	38	32	47	38	33	45	37	32	46	38	32	44	37	32	37	32	37	32	30
0.8		59	50	43	56	48	42	58	49	43	55	48	42	56	48	43	54	47	42	47	42	47	42	39
1.0		68	59	52	63	56	50	67	58	51	63	55	50	64	56	51	61	54	49	55	50	54	49	47
1.25		77	68	60	71	63	58	75	66	60	70	63	57	72	64	59	68	62	57	63	57	62	57	54
1.5		83	74	67	76	69	63	81	73	66	75	68	63	78	70	65	73	67	62	68	63	67	62	59
2.0		93	84	78	83	77	72	90	83	76	82	76	71	86	79	74	80	75	71	76	72	75	71	67
2.5		99	91	85	87	82	78	96	89	83	86	81	77	91	85	80	84	80	76	82	78	80	76	73
3.0		104	97	91	91	86	82	101	95	89	90	85	82	95	90	86	88	84	81	86	82	84	81	77
4.0		110	104	99	95	92	88	107	101	97	94	91	88	100	96	92	92	89	86	91	88	89	86	82
5.0		114	109	104	98	95	92	110	106	102	97	94	91	103	100	97	94	92	90	95	92	92	90	85