


型番: DRGC30H12S/N-PJX8


### 配光曲線図

光度 cd/1000lm

— A-A  
— B-B  
— C-C

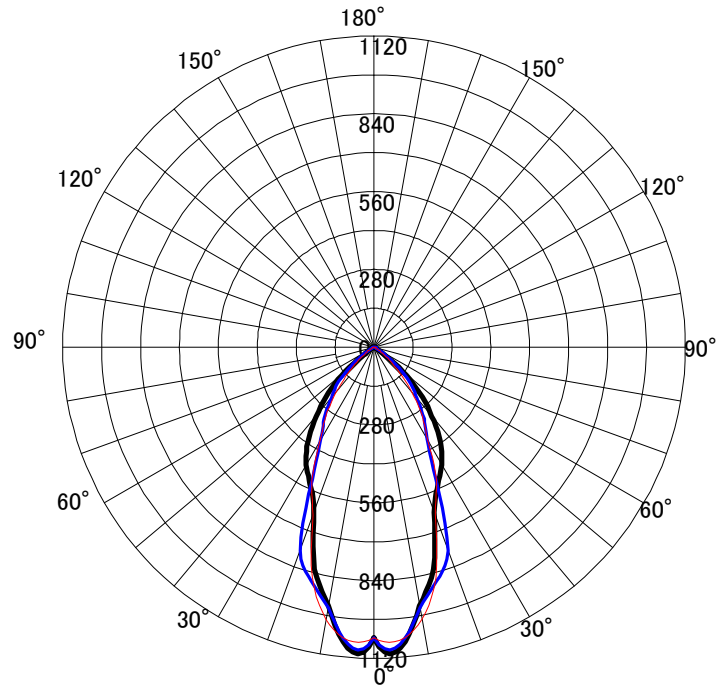

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	4	4	4
-80°	6	6	6
-70°	7	6	8
-60°	11	18	19
-50°	135	72	119
-40°	323	212	238
-30°	488	387	381
-20°	631	643	779
-10°	944	993	951
0°	1045	1045	1045
10°	944	993	951
20°	631	643	779
30°	488	387	381
40°	323	212	238
50°	135	72	119
60°	11	18	19
70°	7	6	8
80°	6	6	6
90°	4	4	4

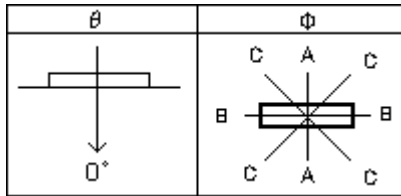

器具効率	最大取付間隔	保守率		
UP 0.1 %	A-A 0.72 H	良	中	否
DN 99.9 %	B-B 0.74 H	83	81	79

反射率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
		床	30		10		30		10		30		10		30		10		30		10		0		
室指数		照明率 U ( × 0.01 )																							
0.6		72	66	61	69	64	60	71	65	61	68	63	60	70	65	61	67	63	60	64	60	63	60	58	
0.8		84	78	73	79	75	71	83	77	73	79	74	71	81	76	72	78	74	71	75	71	74	71	69	
1.0		92	86	81	85	81	78	91	85	81	85	81	78	88	83	80	84	80	78	82	79	80	78	76	
1.25		99	93	89	91	87	85	98	92	88	90	87	84	94	90	86	89	86	84	88	85	86	84	82	
1.5		104	99	94	94	91	89	102	97	93	94	91	89	99	95	91	92	90	88	92	89	90	88	86	
2.0		111	106	102	99	97	95	109	104	101	98	96	94	104	101	98	97	95	94	98	95	95	94	91	
2.5		116	111	108	102	100	99	113	109	106	101	100	98	108	105	103	100	98	97	101	99	98	97	94	
3.0		119	115	112	104	103	101	116	113	110	103	102	101	110	108	106	101	100	100	104	102	100	100	96	
4.0		123	120	118	106	106	105	119	117	115	105	105	104	113	112	110	104	103	103	107	106	103	103	99	
5.0		125	123	122	108	107	107	122	120	119	107	106	106	115	114	113	105	105	105	109	108	105	105	101	