



### 配光曲線図

光度 cd/1000lm

— A-A  
— B-B  
— C-C

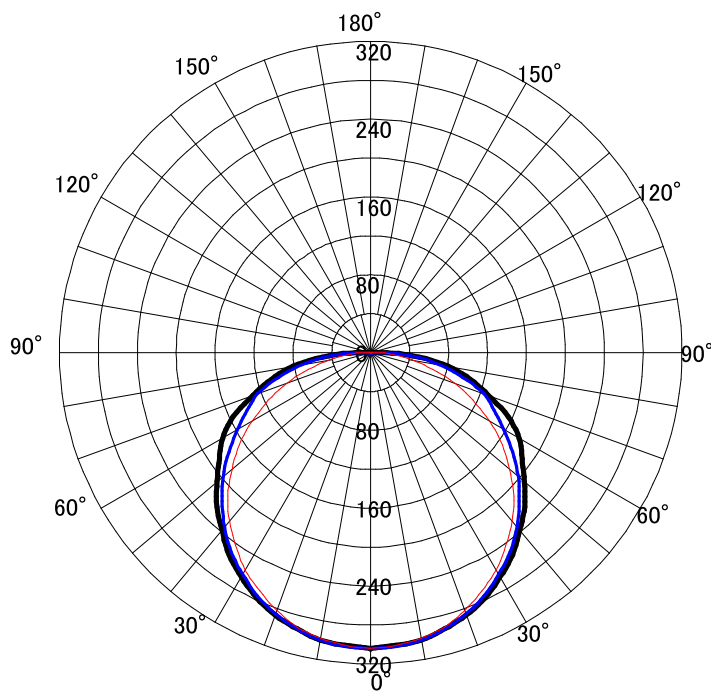

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	16	13	16
-80°	81	43	72
-70°	129	92	124
-60°	176	141	158
-50°	206	186	198
-40°	238	226	234
-30°	266	258	263
-20°	287	282	286
-10°	300	298	300
0°	304	304	304
10°	300	298	300
20°	287	282	286
30°	266	258	263
40°	238	226	234
50°	206	186	198
60°	176	141	158
70°	129	92	124
80°	81	43	72
90°	16	13	16

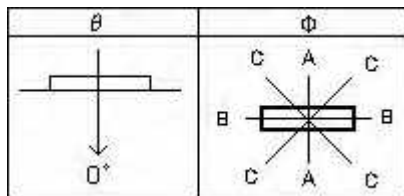

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.29 H	良	中	否
DN 99.7 %	B-B 1.26 H	83	81	77

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数		照明率 U ( × 0.01 )																						
0.6		45	36	29	43	35	29	44	35	29	42	34	29	43	35	29	41	34	29	34	29	34	29	27
0.8		56	46	40	53	45	39	55	46	39	52	44	38	53	45	39	51	43	38	44	38	43	38	36
1.0		65	55	48	61	53	46	64	55	48	60	52	46	61	53	47	58	51	46	52	46	51	46	43
1.25		74	64	57	68	60	54	72	63	56	67	60	54	69	61	55	65	59	54	59	54	59	54	51
1.5		81	71	64	73	66	60	79	70	63	72	66	60	75	68	62	70	64	59	65	60	64	59	56
2.0		91	82	75	81	75	70	89	81	74	80	74	69	84	77	72	78	73	69	74	70	73	69	65
2.5		98	90	83	86	81	76	95	88	82	85	80	76	90	84	79	83	79	75	80	76	79	75	71
3.0		103	96	90	90	86	82	100	94	88	89	85	81	95	89	85	87	83	80	85	82	83	80	76
4.0		110	105	100	95	92	89	107	102	97	94	91	88	101	96	93	92	89	87	92	89	89	87	82
5.0		115	110	106	98	95	93	111	107	103	97	95	92	104	101	98	95	93	91	96	93	93	91	86