


配光曲線図

光度 cd/1000lm

— A-A
— B-B
— C-C

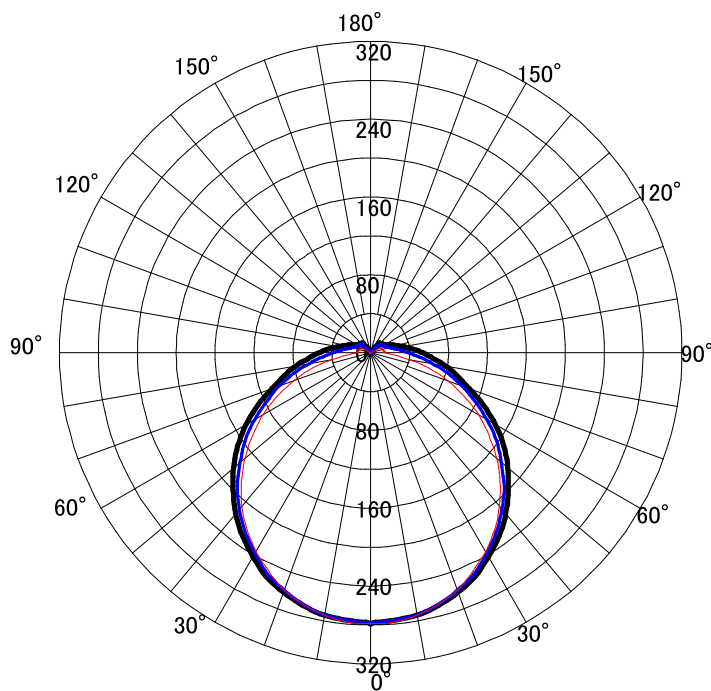

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	12	0	0
-130°	14	0	12
-120°	16	0	14
-110°	23	12	17
-100°	34	13	24
-90°	53	14	38
-80°	78	40	64
-70°	108	84	100
-60°	148	128	138
-50°	184	169	175
-40°	216	206	210
-30°	242	236	238
-20°	262	260	260
-10°	274	274	274
0°	278	278	278

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	278	278	278
10°	274	274	274
20°	262	260	260
30°	242	236	238
40°	216	206	210
50°	184	169	175
60°	148	128	138
70°	108	84	100
80°	78	40	64
90°	53	14	38
100°	34	13	24
110°	23	12	17
120°	16	0	14
130°	14	0	12
140°	12	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0



器具効率	最大取付間隔	保守率		
UP 8.6 %	A-A 1.30 H	良	中	否
DN 91.3 %	B-B 1.25 H	83	81	77

反射率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30		10		30		10		30		10		30		10		30		10		0			
室指数		照明率 U (× 0.01)																							
0.6		44	35	29	42	34	28	43	34	28	41	33	28	41	33	28	39	32	27	32	27	32	27	24	
0.8		55	45	38	52	43	37	53	44	38	50	43	37	50	42	37	48	41	36	41	36	41	36	32	
1.0		64	54	47	59	51	45	62	52	46	58	50	44	58	50	44	55	48	43	48	43	48	43	39	
1.25		72	62	55	66	58	52	70	61	54	65	57	52	65	58	52	62	55	50	55	50	55	50	46	
1.5		78	69	62	71	64	58	76	67	60	70	63	57	71	64	58	66	61	56	60	55	61	56	51	
2.0		88	79	72	79	72	67	85	77	70	77	71	66	79	73	67	73	68	64	68	64	68	64	58	
2.5		95	86	80	83	78	73	91	84	78	82	76	72	84	79	74	78	74	70	74	70	74	70	63	
3.0		100	92	86	87	82	78	96	89	84	85	81	77	89	84	79	82	78	74	79	75	78	74	68	
4.0		106	100	95	92	88	85	102	97	92	90	87	83	94	90	86	86	83	81	84	81	83	81	73	
5.0		111	105	101	95	92	89	106	101	97	93	90	87	98	94	91	89	87	84	88	85	87	84	77	