


配光曲線図


— A-A  
 — B-B  
 — C-C

光度 cd/1000lm

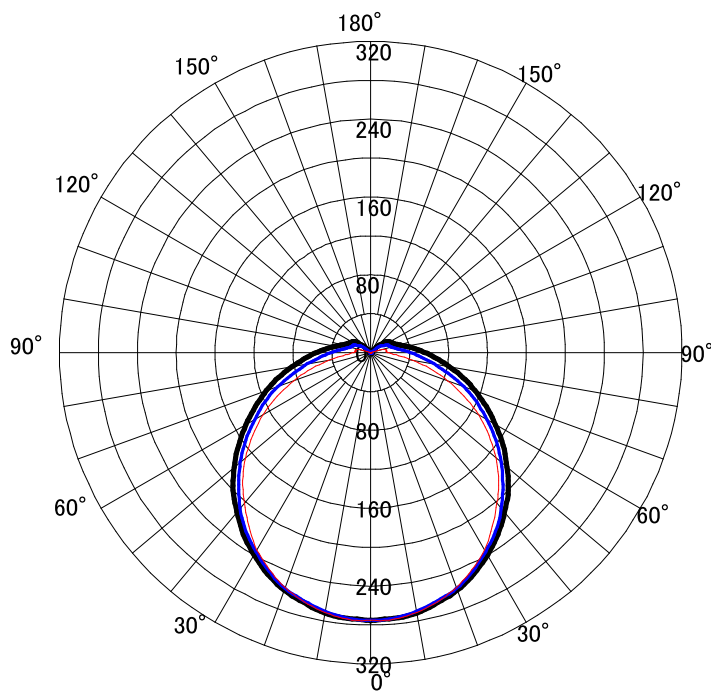

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	0	0	0
-130°	12	0	0
-120°	22	0	14
-110°	26	0	20
-100°	37	16	26
-90°	56	18	41
-80°	82	42	66
-70°	114	84	102
-60°	148	128	138
-50°	183	168	175
-40°	214	202	209
-30°	240	234	236
-20°	260	257	258
-10°	272	271	270
0°	275	275	275

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	275	275	275
10°	272	271	270
20°	260	257	258
30°	240	234	236
40°	214	202	209
50°	183	168	175
60°	148	128	138
70°	114	84	102
80°	82	42	66
90°	56	18	41
100°	37	16	26
110°	26	0	20
120°	22	0	14
130°	12	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

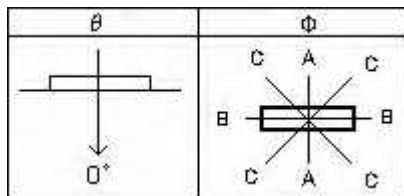

器具効率	最大取付間隔	保守率		
UP 8.4 %	A-A 1.30 H	良	中	否
DN 91.6 %	B-B 1.25 H	83	81	77

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数		照明率 U ( × 0.01 )																						
0.6		44	34	28	41	33	28	42	34	28	41	33	28	40	33	27	39	32	27	32	27	32	27	24
0.8		55	45	38	51	43	37	53	44	37	50	42	37	50	42	36	48	41	36	41	35	41	36	32
1.0		63	53	46	59	51	45	61	52	45	57	50	44	58	50	44	55	48	43	48	43	48	43	39
1.25		72	62	55	66	58	52	70	60	54	64	57	51	65	58	52	61	55	50	55	50	55	50	45
1.5		78	69	61	71	64	58	76	67	60	69	63	57	71	63	58	66	60	55	60	55	60	55	50
2.0		88	79	72	78	72	67	85	77	70	77	71	66	79	72	67	73	68	64	68	64	68	64	58
2.5		94	86	80	83	78	73	91	84	77	82	76	72	84	78	73	78	73	70	74	70	73	70	63
3.0		100	92	86	87	82	78	96	89	84	85	81	77	89	84	79	82	78	74	79	75	78	74	68
4.0		107	100	95	92	88	85	102	97	92	90	87	83	95	90	87	87	83	81	84	81	83	81	74
5.0		111	106	101	95	92	89	106	102	97	93	90	87	98	94	91	89	87	84	88	85	87	84	77