


配光曲線図

光度 cd/1000lm

— A-A
— B-B
— C-C

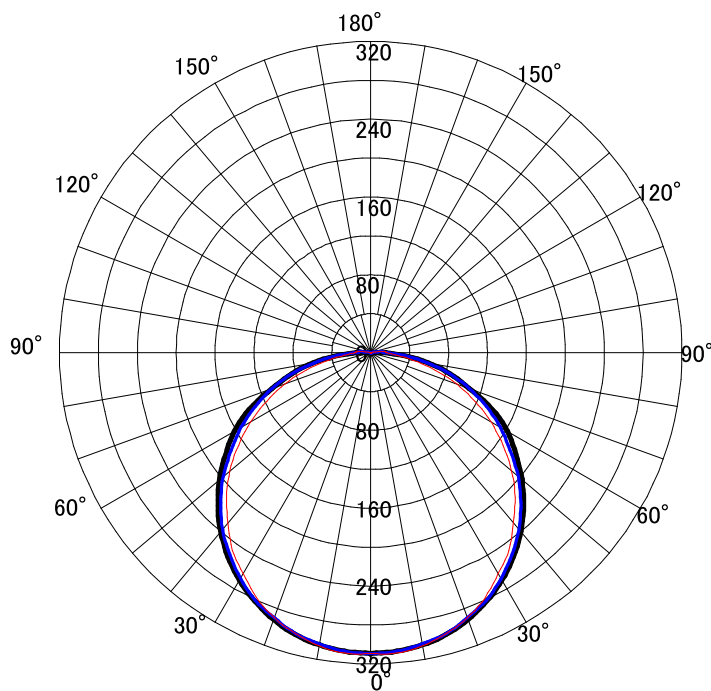

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	0	0	0
-130°	0	0	0
-120°	0	0	0
-110°	0	0	0
-100°	0	0	0
-90°	12	16	14
-80°	60	44	59
-70°	108	94	108
-60°	162	143	154
-50°	203	189	198
-40°	240	228	237
-30°	270	262	268
-20°	292	290	290
-10°	305	306	304
0°	309	309	309

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	309	309	309
10°	305	306	304
20°	292	290	290
30°	270	262	268
40°	240	228	237
50°	203	189	198
60°	162	143	154
70°	108	94	108
80°	60	44	59
90°	12	16	14
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0



器具効率	最大取付間隔		保守率		
	UP 0.9 % 100.0 % DN 99.1 %	A-A 1.31 H	良	中	否
	B-B 1.26 H	83	81	77	

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	45	36	30	43	35	29	44	36	30	42	35	29	43	35	29	41	34	29	34	29	34	29	27	
0.8	57	47	40	53	45	39	55	46	40	52	45	39	53	45	39	51	44	38	44	39	44	38	36	
1.0	66	56	48	61	53	47	64	55	48	60	52	46	61	53	47	58	51	46	52	46	51	46	43	
1.25	74	64	57	68	60	54	72	63	56	67	60	54	69	61	55	65	59	54	59	54	59	54	50	
1.5	81	71	64	73	66	60	79	70	63	72	65	60	75	67	61	70	64	59	65	60	64	59	56	
2.0	90	82	74	81	74	69	88	80	73	79	74	69	83	76	71	77	72	68	73	69	72	68	64	
2.5	97	89	82	85	80	75	94	87	81	84	79	74	89	83	78	82	77	73	79	75	77	73	70	
3.0	102	95	88	89	84	80	99	92	87	88	83	79	93	88	83	86	82	78	84	80	82	78	74	
4.0	108	102	97	94	90	86	105	99	95	93	89	85	99	94	90	90	87	84	89	86	87	84	80	
5.0	112	107	102	97	93	90	109	104	100	95	92	89	102	98	95	93	90	88	93	90	90	88	83	