



型番：MVB2101/08N5-N8 器具全光束 800lm

光源：DLU20805/N-N8

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	7	8	7
-170°	8	8	8
-160°	8	8	8
-150°	6	7	6
-140°	5	6	6
-130°	10	6	6
-120°	12	6	9
-110°	15	6	12
-100°	24	7	16
-90°	42	8	30
-80°	68	36	60
-70°	100	84	99
-60°	150	134	142
-50°	191	178	184
-40°	228	214	222
-30°	258	251	254
-20°	280	276	276
-10°	294	292	292
0°	298	298	298

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	298	298	298
10°	294	292	292
20°	280	276	276
30°	258	251	254
40°	228	214	222
50°	191	178	184
60°	150	134	142
70°	100	84	99
80°	68	36	60
90°	42	8	30
100°	24	7	16
110°	15	6	12
120°	12	6	9
130°	10	6	6
140°	5	6	6
150°	6	7	6
160°	8	8	8
170°	8	8	8
180°	7	8	7

### 配光曲線図

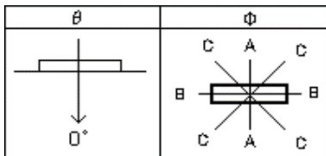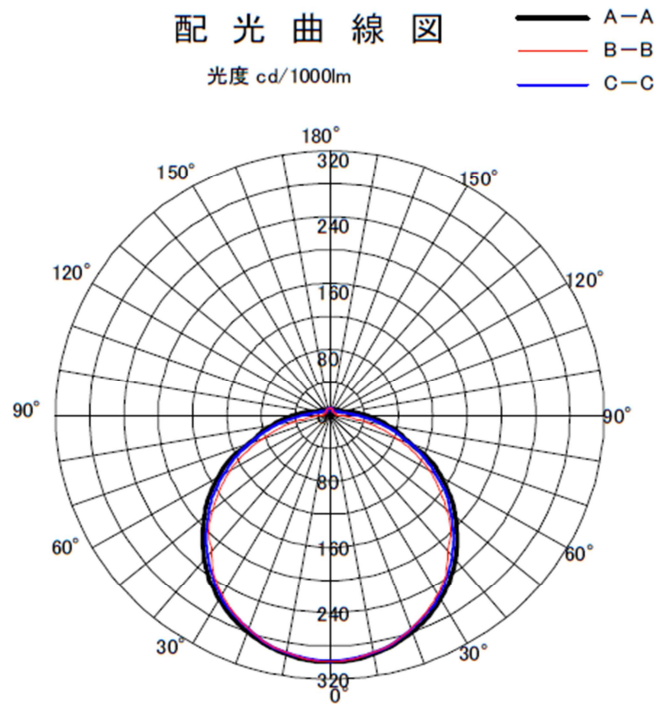

器具効率		最大取付間隔		保守率		
UP	6.9 %	A-A	1.29 H	良	中	否
	100.0 %					
DN	93.1 %	B-B	1.25 H	83	81	78

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U ( × 0.01 )																							
0.6	45	36	30	43	35	29	44	35	30	42	34	29	42	34	29	40	33	29	33	28	33	29	26	
0.8	56	47	40	53	45	39	55	46	39	52	44	39	52	44	38	50	43	38	43	37	43	38	34	
1.0	65	55	48	60	53	47	63	54	48	59	52	46	60	52	46	57	50	45	50	45	50	45	41	
1.25	74	64	57	68	60	54	72	63	56	66	59	54	67	60	54	64	57	53	57	52	57	53	48	
1.5	80	71	64	73	66	60	78	69	62	71	65	59	73	66	60	68	63	58	63	58	63	58	53	
2.0	90	81	74	80	74	69	87	79	73	79	73	68	81	75	70	75	71	66	71	67	71	66	61	
2.5	96	88	82	85	80	75	93	86	80	83	78	74	87	81	76	80	76	72	76	73	76	72	66	
3.0	101	94	88	89	84	80	98	91	86	87	83	79	91	86	82	84	80	77	81	78	80	77	71	
4.0	108	102	97	93	90	86	104	99	94	92	88	85	97	92	89	88	85	83	87	84	85	83	76	
5.0	112	107	103	96	93	90	108	103	99	94	92	89	100	96	93	91	89	86	90	88	89	86	80	