



型番：MAB2101/32N5-N8 器具全光束 3140lm

光源：DLU23205/N-N8

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	8	8	8	0°	322	322	322
-170°	8	8	8	10°	318	316	316
-160°	8	8	8	20°	303	300	300
-150°	6	7	6	30°	278	272	274
-140°	5	6	6	40°	245	236	240
-130°	5	6	6	50°	206	194	200
-120°	5	6	6	60°	160	146	153
-110°	5	7	6	70°	101	94	104
-100°	6	7	6	80°	52	40	53
-90°	6	8	8	90°	6	8	8
-80°	52	40	53	100°	6	7	6
-70°	101	94	104	110°	5	7	6
-60°	160	146	153	120°	5	6	6
-50°	206	194	200	130°	5	6	6
-40°	245	236	240	140°	5	6	6
-30°	278	272	274	150°	6	7	6
-20°	303	300	300	160°	8	8	8
-10°	318	316	316	170°	8	8	8
0°	322	322	322	180°	8	8	8

配光曲線図

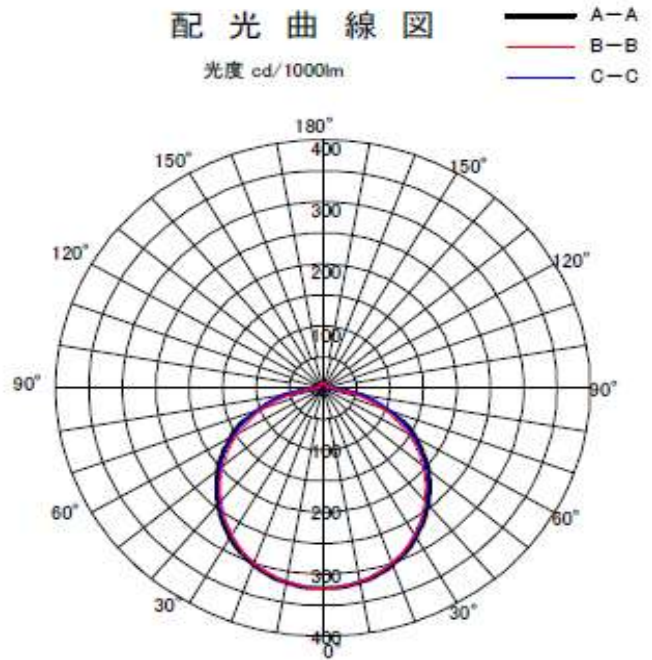

器具効率	最大取付間隔	保守率		
UP 4.0 %	A-A 1.27 H	良	中	否
99.9 %	B-B 1.25 H	83	81	78
DN 95.9 %				

反射率 (%)	天井	80						70						50						30						0		
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																											
0.6	46	37	31	44	36	31	45	37	31	43	36	31	44	36	31	42	35	30	35	30	35	30	35	30	28			
0.8	58	48	42	54	46	41	57	48	41	53	46	40	54	46	41	52	45	40	45	40	45	40	45	40	37			
1.0	67	57	50	62	55	49	65	56	50	61	54	48	62	55	49	59	53	48	53	48	53	48	53	48	44			
1.25	76	66	59	70	62	57	74	65	59	68	62	56	70	63	57	66	60	55	61	56	60	55	60	55	52			
1.5	82	73	66	75	68	63	80	72	65	74	67	62	76	69	63	71	66	61	66	61	66	61	66	61	57			
2.0	92	84	77	82	76	72	89	82	76	81	76	71	84	78	73	78	74	70	75	70	74	70	74	70	65			
2.5	99	91	85	87	82	78	96	89	83	86	81	77	90	84	80	83	79	75	80	77	79	75	75	71				
3.0	104	97	91	91	86	83	100	94	89	89	85	82	94	89	85	87	83	80	85	81	83	80	75					
4.0	110	105	100	95	92	89	106	102	97	94	91	88	99	96	92	91	88	86	90	88	88	86	81					
5.0	114	110	105	98	95	93	110	106	102	97	94	92	103	100	97	94	92	90	94	92	92	90	84					