


型番: MRD16001W

配光曲線図


光度 cd/1000lm

— A - A
— B - B
— C - C

光度(cd/1000lm)			
	A-A	B-B	C-C
-90 °	7	7	7
-80 °	9	9	9
-70 °	18	18	18
-60 °	24	24	24
-50 °	36	36	36
-40 °	58	58	58
-30 °	138	138	138
-20 °	536	536	536
-10 °	2486	2486	2486
0 °	4342	4342	4342
10 °	2486	2486	2486
20 °	536	536	536
30 °	138	138	138
40 °	58	58	58
50 °	36	36	36
60 °	24	24	24
70 °	18	18	18
80 °	9	9	9
90 °	7	7	7

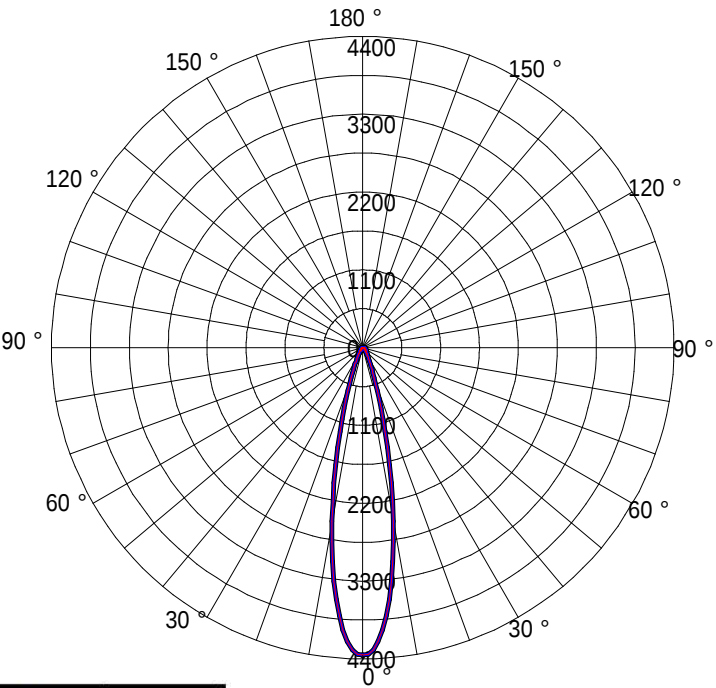

機種	タイプ	器具全光束
W	高効率白色	404 lm
WH	高演色白色	276 lm
L	高効率電球色	319 lm
LH	高演色電球色	234 lm

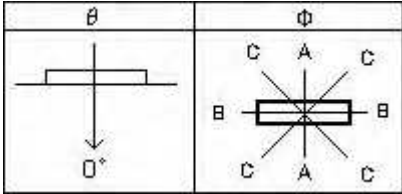

器具効率		最大取付間隔		保守率		
UP	0.2 %	A-A	0.39 H	良	中	否
DN	99.8 %	B-B	0.39 H	74	70	62

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		88	83	79	83	80	78	87	82	79	83	80	78	86	82	79	83	80	78	81	78	80	78	77	
0.8		94	88	85	88	85	82	93	88	84	88	85	82	91	87	83	87	84	82	86	83	84	82	81	
1.0		98	92	88	91	88	85	97	92	88	90	87	85	94	90	87	89	87	85	88	86	87	85	83	
1.25		102	97	93	94	91	88	101	96	92	93	90	88	98	93	90	92	90	88	91	89	90	88	86	
1.5		105	100	96	96	93	91	104	99	95	95	92	90	100	96	93	94	91	90	94	91	91	90	87	
2.0		110	105	101	98	96	94	108	103	100	97	95	93	103	100	97	96	94	92	96	94	94	92	90	
2.5		113	108	105	100	98	96	110	106	103	99	97	95	105	102	99	97	96	94	98	96	96	94	91	
3.0		115	111	108	101	99	97	112	109	105	100	98	97	107	104	101	98	97	95	100	98	97	95	92	
4.0		119	115	112	103	101	99	115	112	109	102	100	99	109	107	104	100	99	97	102	100	99	97	94	
5.0		121	118	115	104	102	101	117	114	112	103	101	100	110	108	106	101	100	98	103	102	100	98	95	