


型番: MRD16002W

配光曲線図


光度 cd/1000lm

— A-A
— B-B
— C-C

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	7	7	7
-80°	11	11	11
-70°	20	20	20
-60°	38	38	38
-50°	78	78	78
-40°	211	211	211
-30°	460	460	460
-20°	694	694	694
-10°	798	798	798
0°	837	837	837
10°	798	798	798
20°	694	694	694
30°	460	460	460
40°	211	211	211
50°	78	78	78
60°	38	38	38
70°	20	20	20
80°	11	11	11
90°	7	7	7

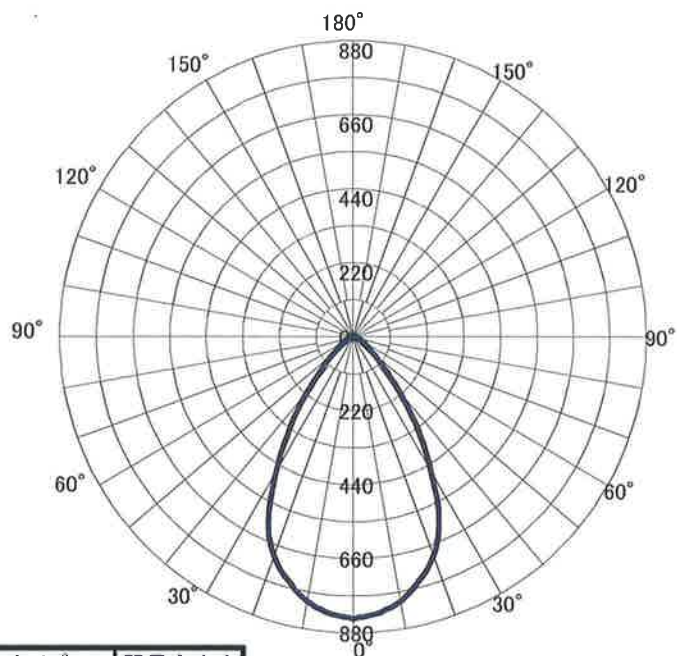

機種	タイプ	器具全光束
W	高効率白色	404 lm
WH	高演色白色	276 lm
L	高効率電球色	319 lm
LH	高演色電球色	234 lm

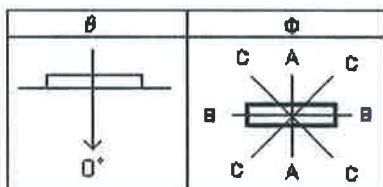

器具効率	最大取付間隔	保守率		
UP 0.2 %	A-A 0.97 H	良	中	否
DN 99.7 %	B-B 0.97 H	74	70	62

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		68	61	56	64	59	55	67	60	56	64	59	55	66	60	55	63	58	55	59	55	58	55	53	
0.8		78	71	66	73	68	64	77	70	66	73	68	64	75	69	65	72	67	64	68	64	67	64	62	
1.0		85	78	73	79	74	70	84	77	72	78	74	70	81	76	71	77	73	70	74	70	73	70	68	
1.25		92	85	79	84	79	76	90	84	79	83	79	75	87	82	77	82	78	75	80	76	78	75	73	
1.5		96	90	84	88	83	80	95	88	83	87	83	79	91	86	82	85	82	79	83	80	82	79	76	
2.0		103	97	92	92	88	85	101	95	90	91	88	85	96	92	88	89	86	84	88	85	86	84	81	
2.5		107	102	97	95	91	88	105	99	95	94	91	88	100	95	92	92	89	87	92	89	89	87	84	
3.0		111	105	101	97	94	91	107	103	99	96	93	90	102	98	95	94	91	89	94	91	91	89	86	
4.0		115	110	106	99	97	94	111	107	104	98	96	94	105	102	99	96	94	92	97	95	94	92	88	
5.0		117	113	109	101	98	96	114	110	107	100	97	96	107	104	102	97	96	94	99	97	96	94	90	