


配光曲線図


光度 cd/1000lm

— A-A
 — B-B
 — C-C

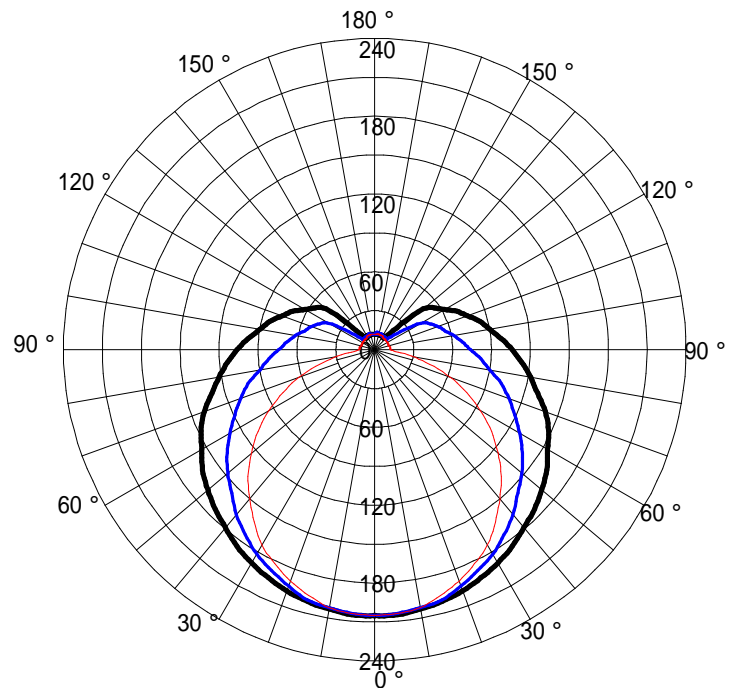

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	12	12	13
-170°	12	12	13
-160°	12	12	13
-150°	12	12	12
-140°	12	11	12
-130°	49	11	13
-120°	62	11	41
-110°	76	11	52
-100°	90	12	62
-90°	106	12	74
-80°	122	29	90
-70°	140	62	110
-60°	154	94	129
-50°	168	124	148
-40°	179	150	166
-30°	190	174	182
-20°	198	190	194
-10°	203	202	202
0°	205	205	205

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	205	205	205
10°	203	202	202
20°	198	190	194
30°	190	174	182
40°	179	150	166
50°	168	124	148
60°	154	94	129
70°	140	62	110
80°	122	29	90
90°	106	12	74
100°	90	12	62
110°	76	11	52
120°	62	11	41
130°	49	11	13
140°	12	11	12
150°	12	12	12
160°	12	12	13
170°	12	12	13
180°	12	12	13

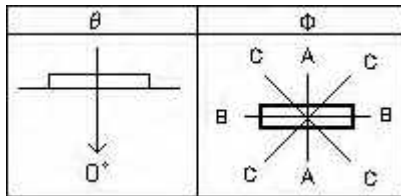

器具効率	最大取付間隔		保守率		
	UP 20.6 % 100 %	A-A 1.34 H	良	中	否
DN 79.9 %	B-B 1.26 H	81	81	71	

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	41	32	26	39	31	25	39	31	25	37	30	25	36	29	24	35	28	23	27	22	28	23	19	
0.8	52	42	35	49	40	34	49	40	34	47	39	33	45	38	32	43	37	32	35	30	37	32	26	
1.0	60	50	43	56	48	42	58	49	42	54	46	41	53	45	39	50	44	38	42	37	44	38	32	
1.25	69	59	52	63	56	50	66	57	50	61	54	48	60	53	47	57	51	46	49	44	51	46	38	
1.5	76	66	59	69	61	56	72	64	57	66	60	54	66	59	53	62	56	51	54	49	56	51	43	
2.0	86	77	70	77	71	65	82	74	68	74	68	64	74	68	63	69	64	60	62	58	64	60	51	
2.5	93	85	79	82	77	72	89	82	76	79	74	70	80	75	70	74	70	66	68	65	70	66	56	
3.0	99	92	87	87	82	78	94	88	83	84	80	76	85	81	76	78	75	72	74	70	75	72	61	
4.0	107	102	97	92	89	86	101	97	93	90	86	84	92	88	85	84	81	79	80	78	81	79	67	
5.0	112	107	103	96	93	91	106	102	99	93	91	88	95	93	90	87	85	83	84	82	85	83	71	