
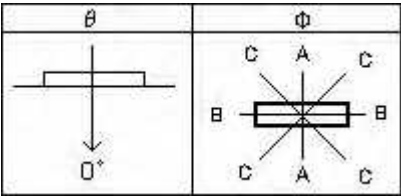


MVDL40227-MKX8(全灯)
器具全光束:6790lm
ランプ:LDL40S・N/22/34/PC

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	1	0	1	0°	194	194	194
-170°	1	0	1	10°	192	190	192
-160°	1	0	1	20°	189	180	185
-150°	1	0	1	30°	183	166	175
-140°	1	0	1	40°	174	146	162
-130°	48	10	35	50°	163	120	144
-120°	51	10	39	60°	150	92	126
-110°	60	10	44	70°	132	60	107
-100°	72	11	50	80°	119	30	90
-90°	89	12	62	90°	89	12	62
-80°	119	30	90	100°	72	11	50
-70°	132	60	107	110°	60	10	44
-60°	150	92	126	120°	51	10	39
-50°	163	120	144	130°	48	10	35
-40°	174	146	162	140°	1	0	1
-30°	183	166	175	150°	1	0	1
-20°	189	180	185	160°	1	0	1
-10°	192	190	192	170°	1	0	1
0°	194	194	194	180°	1	0	1

配 光 曲 線 図

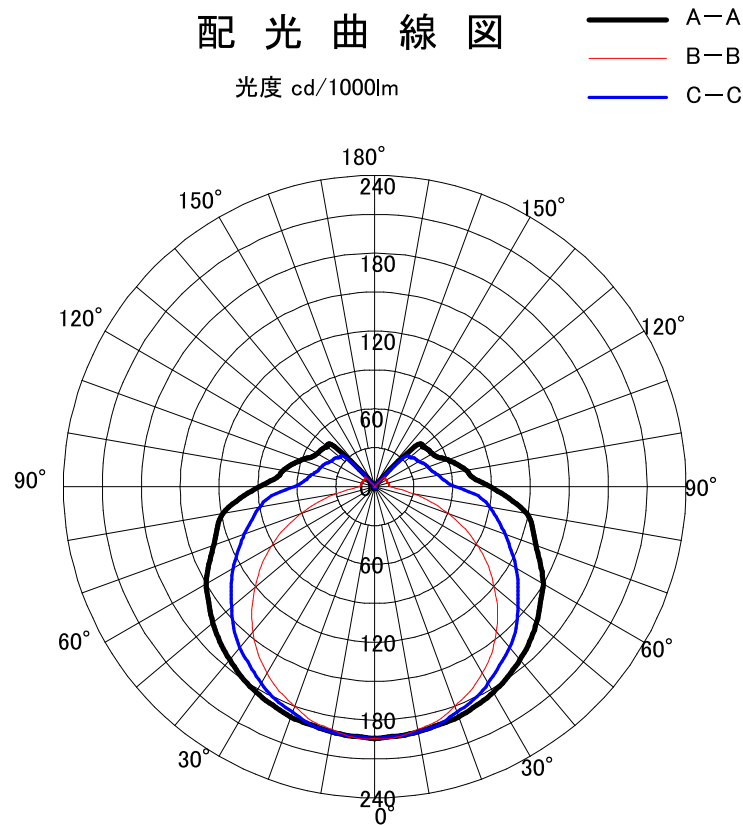

器 具 効 率	最大取付間隔	保 守 率		
UP 18.5 % 99.0 % DN 80.5 %	A-A 1.43 H B-B 1.27 H	良	中	否
		81	81	71

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		40	30	24	38	30	24	38	29	24	36	29	23	35	28	22	34	27	22	26	21	27	22	18	
0.8		50	40	33	47	39	32	48	39	32	45	37	32	44	36	31	42	35	30	34	29	35	30	25	
1.0		58	48	41	54	46	40	56	47	40	52	45	39	51	43	38	49	42	37	40	35	42	37	30	
1.25		67	57	49	61	53	47	64	55	48	59	52	46	58	51	45	55	49	44	47	42	49	44	36	
1.5		73	64	56	67	59	53	70	61	54	64	57	52	64	57	51	60	54	49	52	47	54	49	41	
2.0		83	74	67	74	68	62	79	71	65	72	66	61	72	66	60	67	62	57	60	56	62	57	49	
2.5		90	82	75	80	74	69	86	78	72	77	72	67	78	72	67	72	67	63	66	62	67	63	54	
3.0		96	89	83	84	79	75	91	85	79	81	77	73	83	78	73	76	72	69	71	67	72	69	59	
4.0		103	97	92	89	86	82	98	93	88	87	83	80	89	85	81	81	78	76	77	75	78	76	65	
5.0		108	103	99	93	90	87	102	98	94	90	87	84	92	89	86	84	82	80	81	79	82	80	68	