

MADL40228-MKX8(全灯)
器具全光束:6450lm
ランプ:LDL40S・N/22/34/PC

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	10	11	11	0°	233	233	233
-170°	10	12	11	10°	231	229	230
-160°	10	12	11	20°	224	218	222
-150°	9	11	11	30°	214	200	208
-140°	9	11	10	40°	200	174	188
-130°	9	11	10	50°	182	146	165
-120°	10	10	10	60°	164	112	140
-110°	14	11	12	70°	138	74	118
-100°	47	11	28	80°	110	36	90
-90°	62	12	48	90°	62	12	48
-80°	110	36	90	100°	47	11	28
-70°	138	74	118	110°	14	11	12
-60°	164	112	140	120°	10	10	10
-50°	182	146	165	130°	9	11	10
-40°	200	174	188	140°	9	11	10
-30°	214	200	208	150°	9	11	11
-20°	224	218	222	160°	10	12	11
-10°	231	229	230	170°	10	12	11
0°	233	233	233	180°	10	11	11

配光曲線図
光度 cd/1000lm

—



A-A

—

B-B

—

C-C

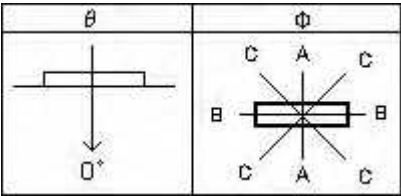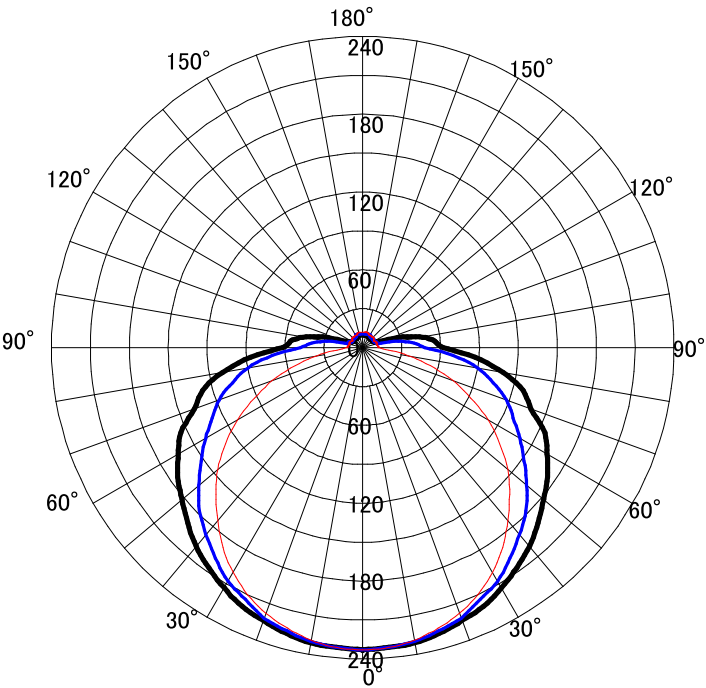

器具効率		最大取付間隔		保守率		
UP	10.6 %	A-A	1.38 H	良	中	否
DN	88.5 %	B-B	1.27 H	81	81	71

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		41	32	26	39	31	26	40	31	26	38	31	25	38	30	25	36	29	24	29	24	29	24	21	
0.8		52	42	35	49	41	34	50	41	35	48	40	34	47	39	34	45	38	33	38	32	38	33	29	
1.0		61	51	43	56	48	42	59	49	43	55	47	41	55	47	41	52	45	40	45	39	45	40	35	
1.25		70	60	52	64	56	50	67	58	51	62	55	49	63	55	49	59	53	47	52	47	53	47	42	
1.5		76	66	59	69	62	56	73	65	58	67	60	55	68	61	55	64	58	53	57	52	58	53	47	
2.0		86	77	70	77	71	65	83	75	69	75	69	64	77	70	65	71	66	62	66	62	66	62	56	
2.5		93	85	79	82	77	72	90	82	76	80	75	71	83	77	72	76	72	68	72	68	72	68	61	
3.0		99	92	86	87	82	78	95	89	83	85	80	76	88	83	78	81	77	74	77	74	77	74	66	
4.0		107	101	96	92	89	85	102	97	93	90	87	84	94	90	87	86	83	81	84	81	83	81	73	
5.0		111	106	102	95	93	90	106	102	99	93	91	88	98	95	92	89	87	85	88	86	87	85	77	