
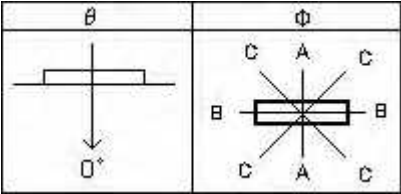


MMDL40129-MKX8(全灯)
器具全光束:3390lm
ランプ:LDL40S・N/22/34/PC

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	10	11	11	0°	196	196	196
-170°	10	11	12	10°	194	193	194
-160°	10	11	12	20°	190	183	186
-150°	10	11	11	30°	182	166	174
-140°	19	10	11	40°	172	147	160
-130°	47	10	18	50°	162	122	144
-120°	58	10	40	60°	150	92	125
-110°	70	10	50	70°	130	60	106
-100°	86	11	60	80°	116	29	88
-90°	101	12	72	90°	101	12	72
-80°	116	29	88	100°	86	11	60
-70°	130	60	106	110°	70	10	50
-60°	150	92	125	120°	58	10	40
-50°	162	122	144	130°	47	10	18
-40°	172	147	160	140°	19	10	11
-30°	182	166	174	150°	10	11	11
-20°	190	183	186	160°	10	11	12
-10°	194	193	194	170°	10	11	12
0°	196	196	196	180°	10	11	11

配光曲線図

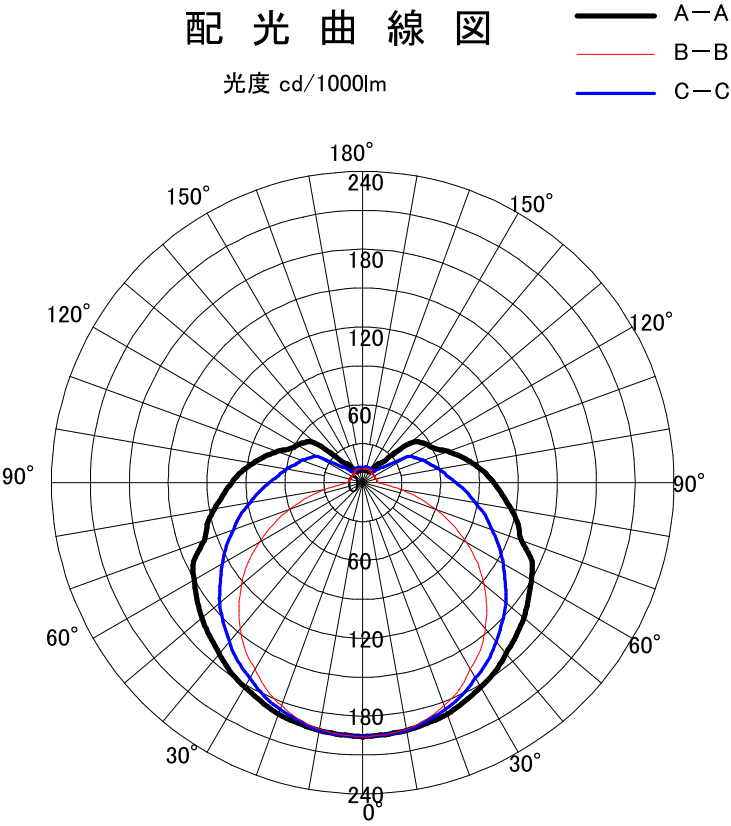

器具効率		最大取付間隔		保守率		
UP	20.9 %	A-A	1.39 H	良	中	否
DN	79.4 %	B-B	1.26 H	81	81	71

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		40	31	25	38	30	24	38	30	24	37	29	24	35	28	23	34	27	23	26	21	27	23	18	
0.8		51	41	34	48	39	33	49	39	33	46	38	32	44	37	31	42	36	30	34	29	36	30	25	
1.0		59	49	42	55	47	40	57	47	41	53	45	39	52	44	38	49	42	37	41	36	42	37	30	
1.25		68	58	50	62	54	48	65	56	49	60	53	47	59	51	46	55	49	44	47	42	49	44	36	
1.5		74	65	57	68	60	54	71	62	55	65	58	53	64	57	51	60	54	50	52	48	54	50	41	
2.0		85	76	68	76	69	63	80	72	66	73	67	62	73	66	61	68	62	58	61	56	62	58	49	
2.5		92	83	77	81	75	70	87	80	74	78	73	68	78	73	68	72	68	64	66	62	68	64	54	
3.0		97	90	84	85	80	76	92	86	81	82	78	74	83	78	74	77	73	70	71	68	73	70	59	
4.0		105	99	94	91	87	84	99	94	90	88	84	81	89	86	82	82	79	77	78	75	79	77	65	
5.0		110	105	100	94	91	88	104	100	96	91	88	86	93	90	87	85	83	81	82	80	83	81	69	