


品名 :HWDGS22001
 定格光束:1,000lm 消費電力:11W

配光曲線図


— A-A
 — B-B
 — C-C

光度 cd/1000lm

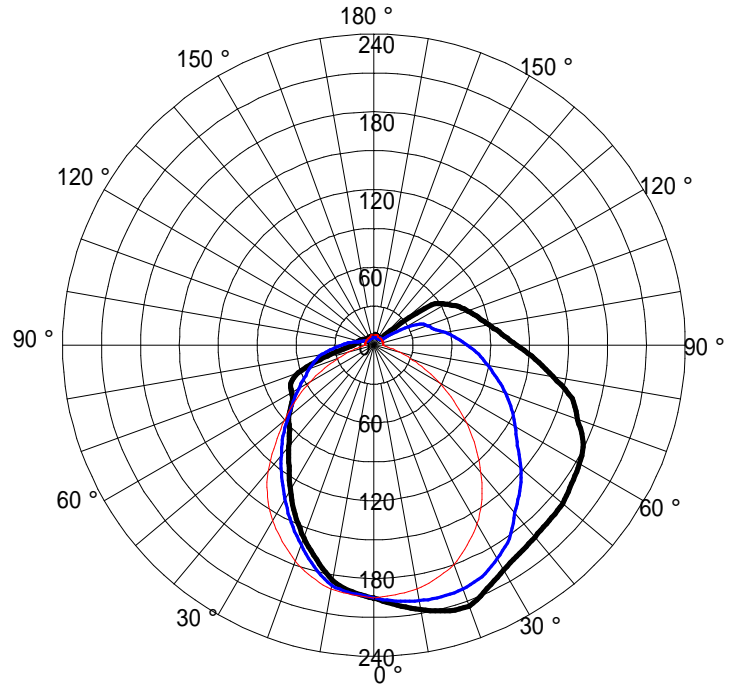

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	8	8	6
-170°	8	8	6
-160°	7	8	6
-150°	7	7	6
-140°	7	7	6
-130°	7	7	6
-120°	9	7	7
-110°	11	7	9
-100°	13	7	14
-90°	16	7	25
-80°	29	13	41
-70°	62	29	53
-60°	73	57	67
-50°	86	90	86
-40°	102	127	111
-30°	129	156	137
-20°	158	177	164
-10°	184	191	188
0°	195	195	195

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	195	195	195
10°	207	191	200
20°	214	180	200
30°	200	159	190
40°	193	128	169
50°	190	93	148
60°	183	59	126
70°	167	30	108
80°	140	13	89
90°	110	7	72
100°	90	7	56
110°	77	7	44
120°	63	7	24
130°	21	7	7
140°	7	7	7
150°	7	7	6
160°	7	8	6
170°	7	8	6
180°	7	8	6

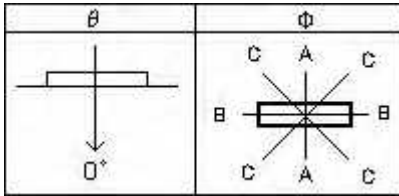

器具効率		最大取付間隔		保守率		
UP	18.6 %	A-A	1.52 H	良	中	否
DN	81.3 %	B-B	1.21 H	72	68	64

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	41	32	26	39	31	26	40	31	26	38	31	25	37	30	24	35	29	24	28	23	29	24	20	
0.8	53	43	36	49	41	35	51	42	35	48	40	34	47	39	33	44	38	33	37	32	38	33	27	
1.0	62	52	45	57	49	43	59	50	44	55	48	42	55	47	41	52	45	40	44	39	45	40	34	
1.25	71	62	54	65	58	52	68	59	53	63	56	51	63	55	50	59	53	48	52	47	53	48	41	
1.5	78	69	62	71	64	59	75	67	60	69	62	57	69	62	56	64	59	54	57	53	59	54	47	
2.0	89	81	75	80	74	69	85	78	72	77	72	68	78	72	68	72	68	64	67	63	68	64	56	
2.5	97	90	84	86	81	77	92	86	81	83	79	75	84	80	75	78	74	71	73	70	74	71	62	
3.0	103	98	93	91	87	84	99	94	89	88	85	82	90	86	83	83	80	78	79	77	80	78	68	
4.0	112	108	104	97	95	93	107	103	100	94	92	90	97	95	92	89	87	86	87	85	87	86	75	
5.0	117	114	111	100	99	98	111	109	107	98	97	96	101	100	98	92	92	91	92	90	92	91	80	