
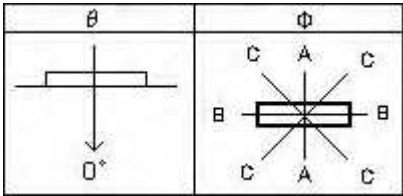


品名 :MRD10003(RP)BW1/N-1
定格光束:700lm 消費電力:8.5W

配光曲線図
光度 cd/1000lm

— A-A
— B-B
— C-C

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	12	10	12
-80°	20	20	20
-70°	37	36	36
-60°	95	92	94
-50°	212	208	210
-40°	292	286	289
-30°	351	349	350
-20°	406	406	405
-10°	432	432	432
0°	439	439	439
10°	432	432	432
20°	406	406	405
30°	351	349	350
40°	292	286	289
50°	212	208	210
60°	95	92	94
70°	37	36	36
80°	20	20	20
90°	12	10	12

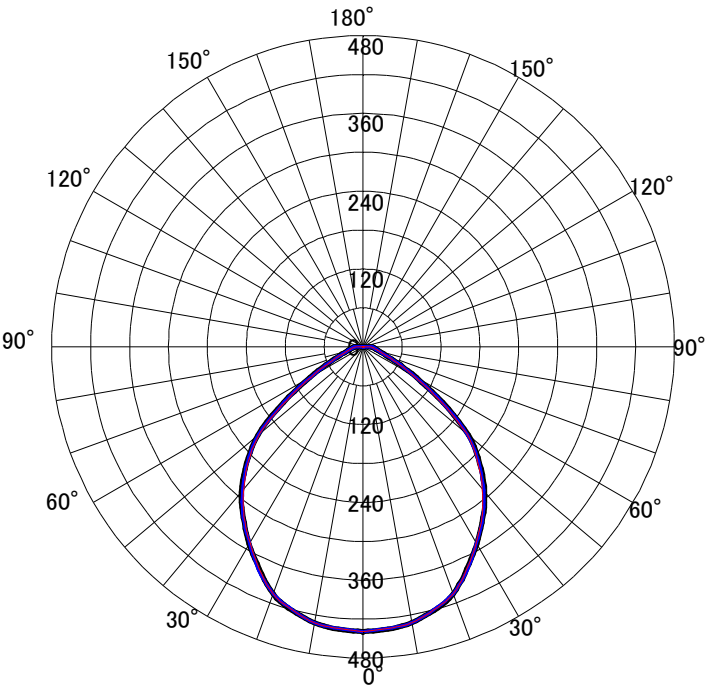

器具効率	最大取付間隔	保守率		
UP 0.3 % 100.0 % DN 99.7 %	A-A 1.21 H B-B 1.19 H	良	中	否
		81	77	68

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		53	44	38	50	43	38	52	44	38	50	43	38	50	43	38	49	42	38	43	38	42	38	36	
0.8		65	56	50	61	54	49	64	55	50	60	53	48	62	54	49	59	53	48	53	49	53	48	46	
1.0		74	65	59	68	62	57	72	64	58	68	61	56	70	63	57	66	60	56	61	56	60	56	54	
1.25		82	73	67	75	69	64	80	72	66	74	68	63	77	70	65	72	67	63	68	64	67	63	60	
1.5		88	79	73	80	74	69	86	78	72	79	73	69	82	76	70	77	72	68	73	69	72	68	65	
2.0		96	88	82	86	81	76	94	87	81	85	80	76	89	83	79	83	79	75	80	76	79	75	72	
2.5		102	95	89	90	85	81	99	93	87	89	84	81	94	89	84	87	83	80	85	81	83	80	76	
3.0		106	99	94	93	88	85	103	97	92	91	88	84	97	92	88	89	86	83	88	85	86	83	79	
4.0		111	105	100	96	93	89	107	103	98	95	92	89	101	97	94	93	90	87	93	90	90	87	83	
5.0		114	109	105	98	95	92	110	106	102	97	94	91	104	100	97	95	92	90	95	93	92	90	86	