


品名 :MRD06013(RP)BW2/N-1  
 定格光束:480lm 消費電力:4.8W


### 配光曲線図

光度 cd/1000lm

— A-A  
 — B-B  
 — C-C

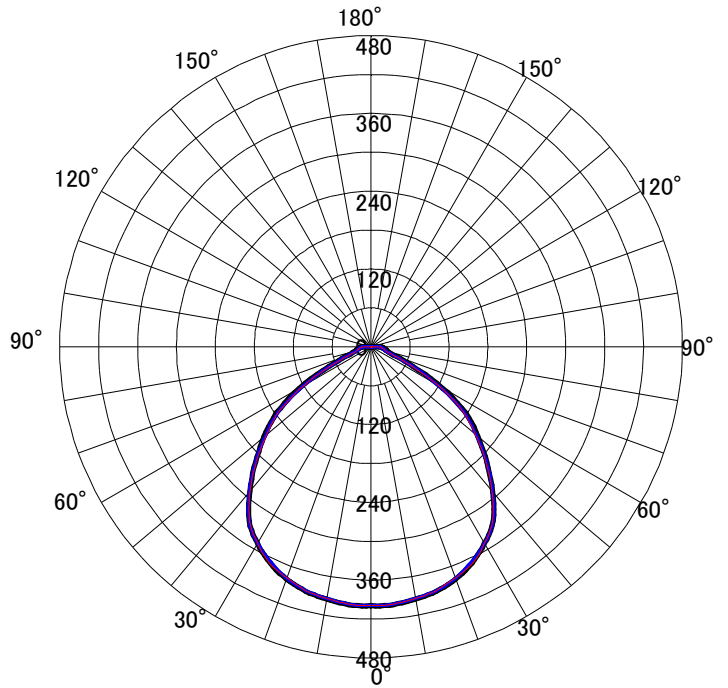

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	15	12	12
-80°	22	20	20
-70°	37	33	35
-60°	128	120	121
-50°	215	210	212
-40°	291	290	292
-30°	350	350	350
-20°	381	379	380
-10°	395	394	394
0°	399	399	399
10°	395	394	394
20°	381	379	380
30°	350	350	350
40°	291	290	292
50°	215	210	212
60°	128	120	121
70°	37	33	35
80°	22	20	20
90°	15	12	12

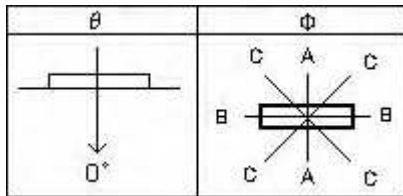

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.29 H	良	中	否
DN	100 %	B-B	1.29 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数		照明率 U ( × 0.01 )																						
0.6		51	43	37	49	42	37	51	43	37	48	41	37	49	42	37	47	41	36	41	36	41	36	34
0.8		64	55	49	60	53	48	63	54	49	59	53	47	61	53	48	58	52	47	52	47	52	47	45
1.0		73	64	58	68	61	56	72	64	57	67	61	56	69	62	57	66	60	55	61	56	60	55	53
1.25		82	73	67	75	68	63	80	72	66	74	68	63	77	70	65	72	67	63	68	63	67	63	60
1.5		88	80	73	80	74	69	86	78	72	79	73	69	82	76	71	77	72	68	73	69	72	68	65
2.0		97	89	83	86	81	77	94	87	82	85	81	77	90	84	79	83	79	76	81	77	79	76	72
2.5		102	96	90	90	86	82	100	93	88	89	85	82	94	89	85	87	84	81	86	82	84	81	77
3.0		107	100	95	93	89	86	104	98	93	92	89	85	98	93	90	90	87	84	89	86	87	84	81
4.0		112	107	102	97	94	91	109	104	100	96	93	90	102	99	95	94	91	89	94	91	91	89	85
5.0		115	111	107	99	96	94	112	108	104	98	95	93	105	102	99	96	94	92	97	94	94	92	87