


品名 : MRD06014(RP)BW1/L-S1  
 定格光束: 420lm 消費電力: 6.2W


### 配光曲線図

光度 cd/1000lm

— A-A  
 — B-B  
 — C-C

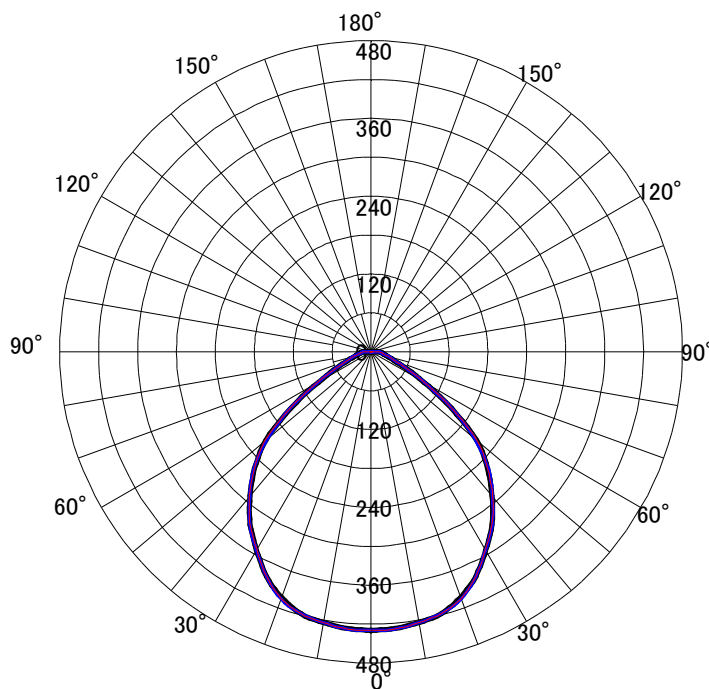

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	11	11	12
-80°	20	20	20
-70°	37	38	38
-60°	94	97	95
-50°	212	214	208
-40°	290	292	291
-30°	353	352	353
-20°	403	405	406
-10°	424	424	424
0°	429	429	429
10°	424	424	424
20°	403	405	406
30°	353	352	353
40°	290	292	291
50°	212	214	208
60°	94	97	95
70°	37	38	38
80°	20	20	20
90°	11	11	12

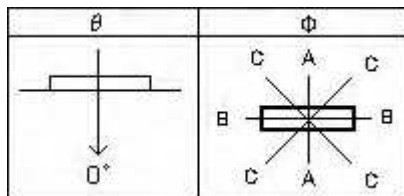

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.23 H	良	中	否
DN	100 %	B-B	1.23 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数		照明率 U ( × 0.01 )																						
0.6		53	44	39	50	43	38	52	44	38	50	43	38	50	43	38	49	42	38	43	38	42	38	36
0.8		65	56	50	61	54	49	64	56	50	60	54	49	62	54	49	59	53	48	53	49	53	48	46
1.0		74	65	59	69	62	57	72	64	58	68	61	56	70	63	57	66	61	56	61	57	61	56	54
1.25		82	73	67	75	69	64	80	72	66	74	68	64	77	70	65	73	67	63	68	64	67	63	60
1.5		88	80	73	80	74	69	86	78	72	79	73	69	82	76	71	77	72	68	73	69	72	68	65
2.0		96	89	83	86	81	77	94	87	81	85	80	76	89	84	79	83	79	75	81	77	79	75	72
2.5		102	95	89	90	85	81	99	93	87	89	85	81	94	89	84	87	83	80	85	82	83	80	76
3.0		106	99	94	93	89	85	103	97	92	92	88	84	97	93	89	89	86	83	88	85	86	83	80
4.0		111	106	101	96	93	90	108	103	98	95	92	89	101	97	94	93	90	88	93	90	90	88	84
5.0		114	109	105	98	95	92	111	106	102	97	94	92	104	101	97	95	92	90	95	93	92	90	86