


品名 : MRD10014(RP)BW1/L-S1
 定格光束: 700lm 消費電力: 9.0W


配光曲線図

光度 cd/1000lm

— A-A
 — B-B
 — C-C

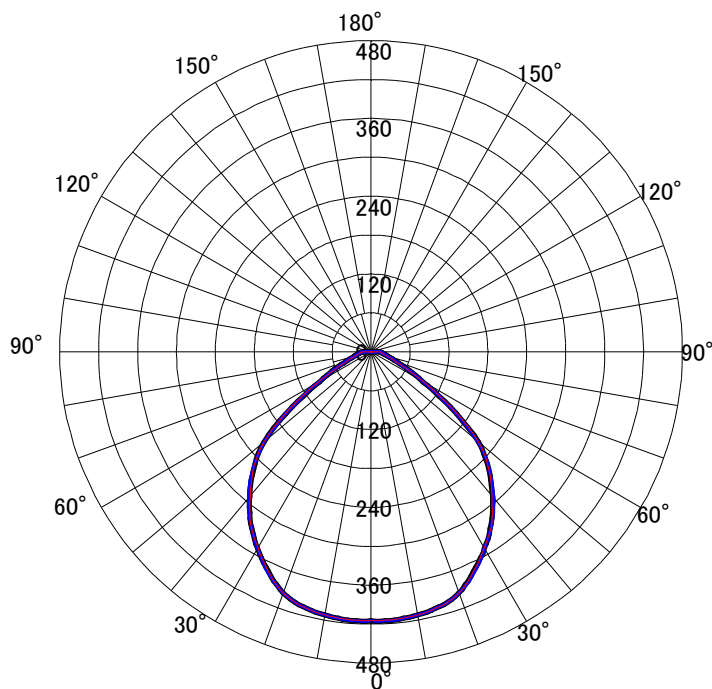

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	12	12	12
-80°	21	20	21
-70°	38	37	38
-60°	92	96	94
-50°	216	216	214
-40°	291	289	294
-30°	350	349	350
-20°	396	396	396
-10°	412	412	412
0°	415	415	415
10°	412	412	412
20°	396	396	396
30°	350	349	350
40°	291	289	294
50°	216	216	214
60°	92	96	94
70°	38	37	38
80°	21	20	21
90°	12	12	12

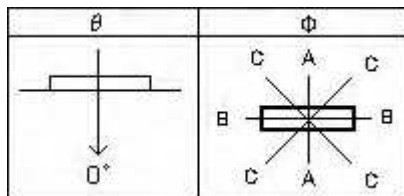

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.26 H	良	中	否
DN	100 %	B-B	1.25 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10				30			10			30			10			30		10		0
室指数	照明率 U (× 0.01)																							
0.6	52	44	38	50	42	37	51	43	38	49	42	37	50	43	37	48	42	37	42	37	42	37	35	
0.8	64	55	49	60	53	48	63	55	49	60	53	48	61	54	48	58	52	48	53	48	52	48	45	
1.0	73	64	58	68	61	56	72	64	57	67	61	56	69	62	57	66	60	55	61	56	60	55	53	
1.25	81	73	66	75	68	63	80	72	66	74	68	63	76	70	64	72	67	62	68	63	67	62	60	
1.5	87	79	72	79	73	68	85	78	72	78	73	68	82	75	70	76	71	67	73	68	71	67	65	
2.0	96	88	82	86	80	76	93	86	81	85	80	75	89	83	78	83	78	75	80	76	78	75	71	
2.5	101	94	88	89	85	81	99	92	87	88	84	80	93	88	84	86	83	79	85	81	83	79	76	
3.0	105	99	93	92	88	84	102	96	91	91	87	84	97	92	88	89	86	83	88	85	86	83	79	
4.0	111	105	100	96	92	89	107	102	98	95	91	88	101	97	93	92	90	87	92	89	90	87	83	
5.0	114	109	104	98	95	92	110	106	102	97	94	91	103	100	97	94	92	90	95	92	92	90	85	