


品名 :MRD10014(RP)BW2/N-S1
 定格光束:800lm 消費電力:9.0W


配光曲線図

光度 cd/1000lm

— A-A
 — B-B
 — C-C

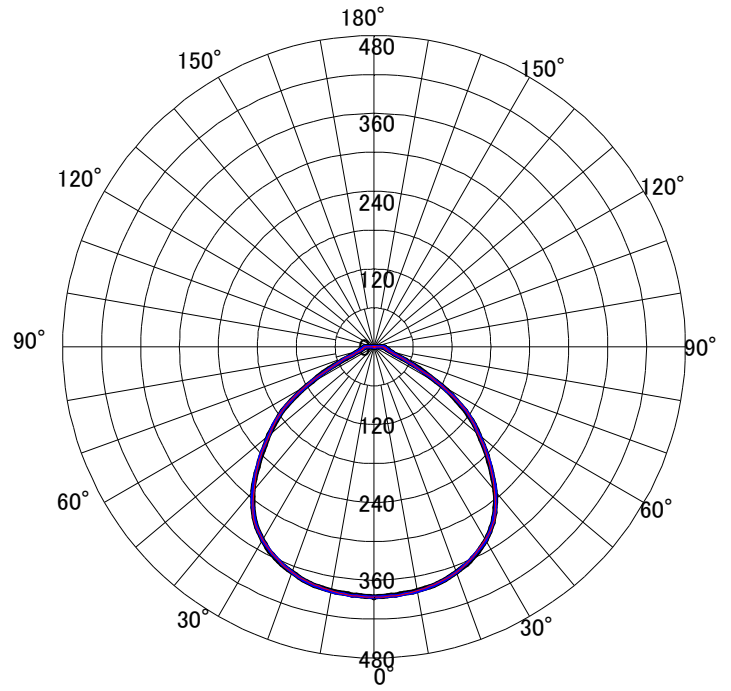

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	13	12	13
-80°	20	18	20
-70°	36	36	36
-60°	120	121	120
-50°	211	210	212
-40°	290	288	291
-30°	344	343	344
-20°	370	370	370
-10°	382	382	383
0°	386	386	386
10°	382	382	383
20°	370	370	370
30°	344	343	344
40°	290	288	291
50°	211	210	212
60°	120	121	120
70°	36	36	36
80°	20	18	20
90°	13	12	13

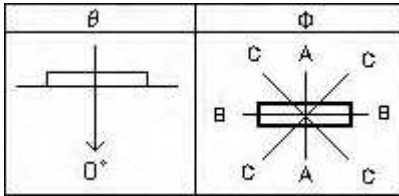

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.32 H	良	中	否
DN	100 %	B-B	1.34 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10				30		10				30		10				30		10		0
室指数	照明率 U (× 0.01)																							
0.6	51	42	36	48	41	36	50	42	36	48	41	36	49	41	36	47	40	36	40	36	40	36	34	
0.8	63	54	48	59	52	47	62	54	47	59	52	46	60	52	47	57	51	46	51	46	51	46	44	
1.0	72	63	57	67	60	55	71	62	56	66	60	55	68	61	55	65	59	54	59	55	59	54	52	
1.25	81	72	65	74	67	62	79	71	64	73	67	62	76	69	63	71	66	61	67	62	66	61	59	
1.5	87	78	72	79	72	68	85	77	71	78	72	67	81	74	69	76	71	67	72	68	71	67	64	
2.0	95	87	81	85	80	75	93	86	80	84	79	75	88	82	78	82	78	74	79	75	78	74	71	
2.5	101	94	88	89	84	80	98	92	86	88	84	80	93	88	83	86	82	79	84	80	82	79	75	
3.0	105	99	93	92	88	84	102	96	91	91	87	83	96	92	88	89	85	82	88	84	85	82	79	
4.0	110	105	100	96	92	89	107	102	97	94	91	88	101	97	93	92	89	87	92	89	89	87	83	
5.0	114	109	104	98	95	92	110	106	102	96	94	91	103	100	97	94	92	89	95	92	92	89	85	