


品名 : MRD06014(RP)BW3/L-S1
 定格光束 : 420lm 消費電力 : 6.2W


配光曲線図

— A-A
 — B-B
 — C-C

光度 cd/1000lm

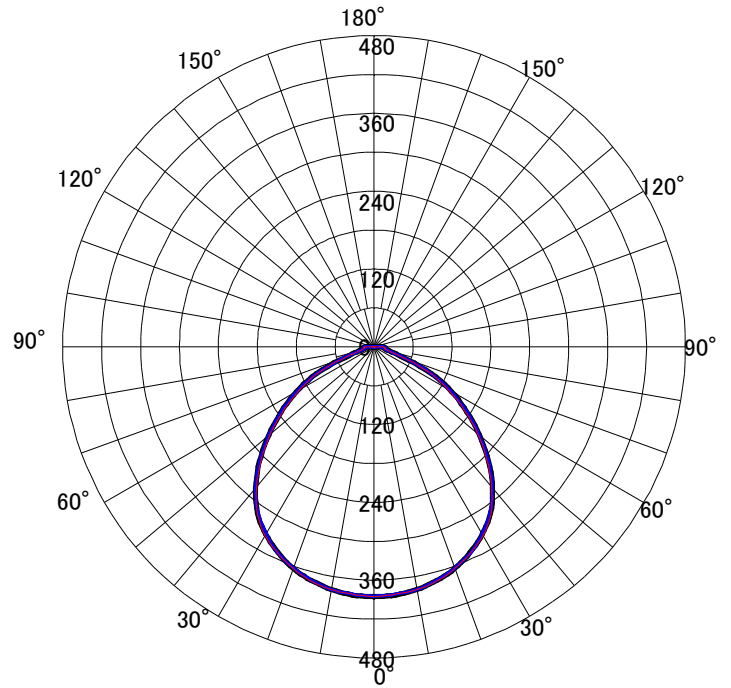

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	12	14	12
-80°	17	17	17
-70°	48	46	47
-60°	138	132	136
-50°	212	209	211
-40°	284	282	284
-30°	334	336	333
-20°	364	364	363
-10°	380	380	380
0°	385	385	385
10°	380	380	380
20°	364	364	363
30°	334	336	333
40°	284	282	284
50°	212	209	211
60°	138	132	136
70°	48	46	47
80°	17	17	17
90°	12	14	12

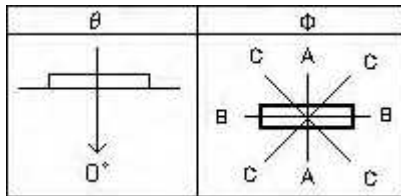

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.29 H	良	中	否
DN	100 %	B-B	1.28 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	50	42	36	48	40	35	49	41	36	47	40	35	48	41	35	46	40	35	40	35	40	35	33	
0.8	63	53	47	59	51	46	61	53	47	58	51	46	59	52	46	57	50	45	51	46	50	45	43	
1.0	72	63	56	67	59	54	70	62	56	66	59	54	68	60	55	64	58	54	59	54	58	54	51	
1.25	80	72	65	74	67	62	79	70	64	73	67	62	75	68	63	71	66	61	67	62	66	61	58	
1.5	87	78	72	79	72	68	85	77	71	78	72	67	81	74	69	76	71	67	72	68	71	67	64	
2.0	96	88	82	85	80	76	93	86	80	84	79	75	89	83	78	82	78	74	80	76	78	74	71	
2.5	102	94	89	90	85	81	99	92	87	89	84	81	94	88	84	86	83	79	85	81	83	79	76	
3.0	106	99	94	93	89	85	103	97	92	92	88	84	97	93	88	89	86	83	88	85	86	83	80	
4.0	111	106	101	96	93	90	108	103	99	95	92	89	102	98	94	93	90	88	93	90	90	88	84	
5.0	115	110	106	99	96	93	111	107	103	97	95	92	104	101	98	95	93	91	96	94	93	91	87	