


品名 :MRD10014(RP)BW3/N-S1  
 定格光束:800lm 消費電力:9.0W


配光曲線図

光度 cd/1000lm

— A-A  
 — B-B  
 — C-C

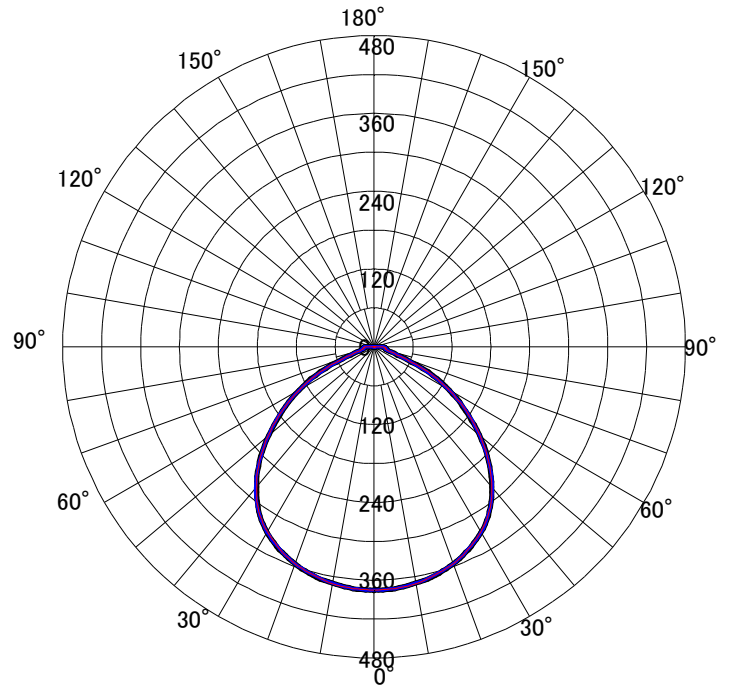

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	14	14	14
-80°	18	18	18
-70°	44	44	43
-60°	134	134	134
-50°	212	213	212
-40°	282	282	284
-30°	330	329	330
-20°	356	356	356
-10°	370	371	370
0°	375	375	375
10°	370	371	370
20°	356	356	356
30°	330	329	330
40°	282	282	284
50°	212	213	212
60°	134	134	134
70°	44	44	43
80°	18	18	18
90°	14	14	14

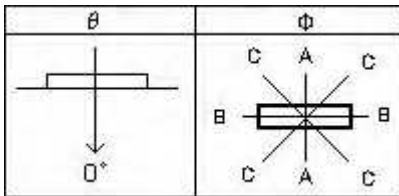

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.31 H	良	中	否
DN	100 %	B-B	1.31 H	81	77	68

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U ( × 0.01 )																							
0.6	50	41	35	47	40	35	49	41	35	47	40	35	48	40	35	46	39	34	39	35	39	34	32	
0.8	62	53	46	58	51	45	61	52	46	58	50	45	59	51	46	56	50	45	50	45	50	45	43	
1.0	71	62	55	66	59	53	70	61	55	65	58	53	67	60	54	64	58	53	58	53	58	53	50	
1.25	80	71	64	73	66	61	78	70	63	72	66	61	75	68	62	70	65	60	66	61	65	60	58	
1.5	86	77	71	78	72	67	84	76	70	77	71	66	80	73	68	75	70	66	71	67	70	66	63	
2.0	95	87	80	85	79	75	92	85	79	84	78	74	88	82	77	82	77	73	79	75	77	73	70	
2.5	101	93	87	89	84	80	98	91	86	88	83	79	93	87	83	86	82	78	84	80	82	78	75	
3.0	105	98	93	92	87	84	102	96	91	91	87	83	96	91	87	88	85	82	87	84	85	82	78	
4.0	110	105	100	95	92	89	107	102	97	94	91	88	101	97	93	92	89	87	92	89	89	87	83	
5.0	114	109	104	98	94	92	110	106	101	96	94	91	103	100	97	94	92	89	95	92	92	89	85	