


型番: MMK1101(P)06-N1 器具全光束 600lm

配光曲線図


— A-A
— B-B
— C-C

光度 cd/1000lm

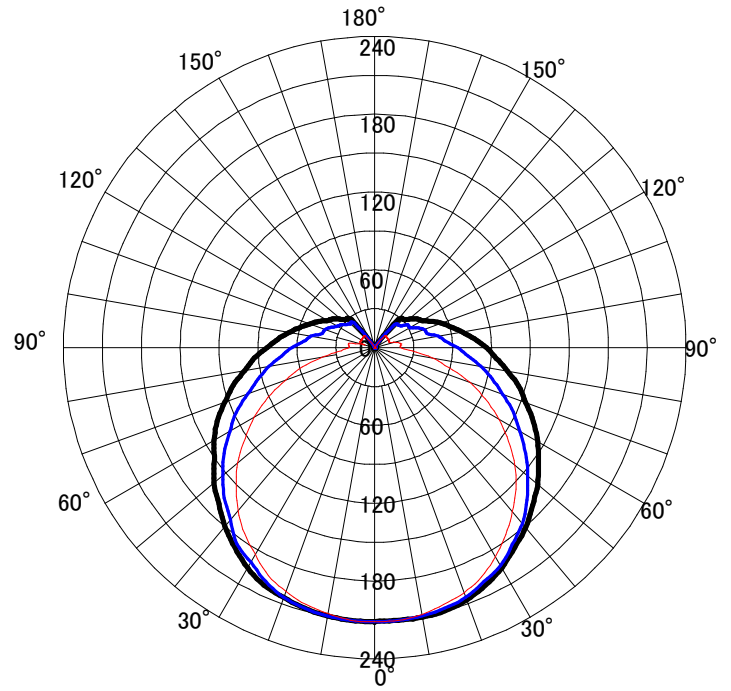

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	1	0	1
-170°	1	0	1
-160°	1	0	1
-150°	1	0	1
-140°	28	12	25
-130°	34	12	28
-120°	42	12	33
-110°	53	12	41
-100°	67	20	50
-90°	83	20	64
-80°	102	40	83
-70°	123	73	104
-60°	143	107	129
-50°	162	138	153
-40°	180	164	173
-30°	196	184	191
-20°	205	200	205
-10°	210	208	210
0°	211	211	211

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	211	211	211
10°	211	209	210
20°	207	201	205
30°	196	186	194
40°	181	165	177
50°	164	141	154
60°	145	111	129
70°	124	78	105
80°	104	45	83
90°	86	20	64
100°	69	20	50
110°	55	12	41
120°	42	12	31
130°	34	12	26
140°	28	12	22
150°	1	0	1
160°	1	0	1
170°	1	0	1
180°	1	0	1

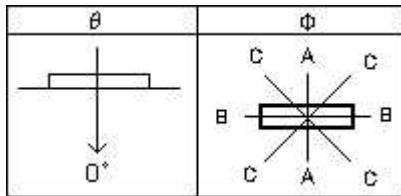

器具効率	最大取付間隔		保守率		
	UP 17.6 % 101.1 % DN 83.4 %	A-A 1.37 H B-B 1.30 H	良 83	中 81	否 78

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	41	32	26	39	31	25	40	31	25	38	30	25	37	29	24	35	28	24	27	23	28	24	19	
0.8	52	42	35	49	40	34	50	40	34	47	39	33	46	38	32	44	37	32	36	30	37	32	26	
1.0	60	50	43	56	47	41	58	48	41	54	46	40	53	45	39	50	44	38	42	37	44	38	32	
1.25	69	59	51	63	55	49	66	56	49	61	53	47	60	53	47	57	50	45	49	44	50	45	38	
1.5	75	65	58	68	60	54	72	63	56	66	59	53	66	58	52	61	55	50	54	49	55	50	43	
2.0	85	76	68	76	69	63	81	73	66	73	67	62	74	67	62	69	63	59	62	57	63	59	50	
2.5	92	83	76	81	75	70	87	80	74	78	73	68	79	73	68	73	69	65	67	63	69	65	55	
3.0	97	90	83	85	80	75	93	86	80	83	78	74	84	79	74	77	73	70	72	69	73	70	60	
4.0	105	98	93	91	86	83	100	94	89	88	84	81	90	86	82	82	79	76	78	75	79	76	66	
5.0	109	104	99	94	90	87	104	99	95	91	88	85	94	90	87	85	83	80	82	80	83	80	69	