


型番: MMK5101(P)/07-N1 器具全光束 700lm

配光曲線図


— A-A
— B-B
— C-C

光度 cd/1000lm

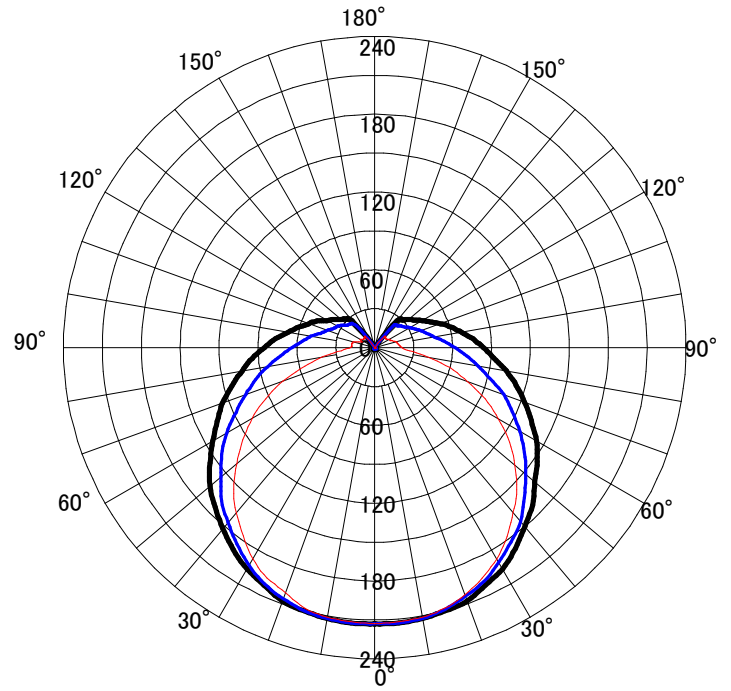

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	27	11	22
-130°	34	11	27
-120°	42	13	33
-110°	54	13	39
-100°	68	18	50
-90°	85	19	64
-80°	104	41	84
-70°	125	75	106
-60°	144	109	132
-50°	166	139	155
-40°	182	166	176
-30°	197	188	194
-20°	208	201	206
-10°	212	211	212
0°	213	213	213

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	213	213	213
10°	212	211	212
20°	208	203	204
30°	197	188	191
40°	180	166	175
50°	161	141	152
60°	144	110	129
70°	123	76	106
80°	103	42	81
90°	84	21	62
100°	68	18	47
110°	54	15	38
120°	42	13	31
130°	34	11	26
140°	27	11	22
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

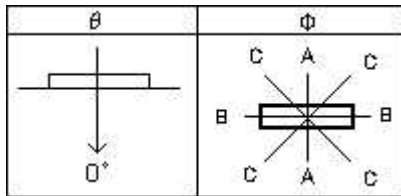

器具効率	最大取付間隔		保守率		
	UP 17.2 % 100.1 % DN 83.0 %	A-A 1.37 H	B-B 1.30 H	良	中
			83	81	78

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U (× 0.01)																							
0.6	41	32	25	39	31	25	39	31	25	38	30	25	37	29	24	35	28	23	27	23	28	23	19	
0.8	51	42	35	48	40	34	49	40	34	47	39	33	46	38	32	44	37	32	35	30	37	32	26	
1.0	60	50	42	56	47	41	57	48	41	54	46	40	53	45	39	50	43	38	42	37	43	38	32	
1.25	68	58	51	63	55	48	65	56	49	61	53	47	60	52	46	56	50	45	49	44	50	45	38	
1.5	75	65	57	68	60	54	71	62	55	65	58	53	65	58	52	61	55	50	54	49	55	50	43	
2.0	84	75	68	75	69	63	81	72	66	73	67	62	73	67	61	68	63	59	62	57	63	59	50	
2.5	91	83	76	80	74	69	87	79	73	78	72	68	79	73	68	73	68	64	67	63	68	64	55	
3.0	97	89	83	85	79	75	92	85	80	82	77	73	84	78	74	77	73	69	72	68	73	69	60	
4.0	104	98	92	90	86	82	99	93	88	87	83	80	89	85	81	82	79	76	78	75	79	76	65	
5.0	108	103	98	93	90	86	103	98	94	90	87	84	93	89	86	85	82	80	82	79	82	80	69	