


型番: MMK2101(P)/10-N1 器具全光束 1000lm

### 配光曲線図


— A-A  
— B-B  
— C-C

光度 cd/1000lm

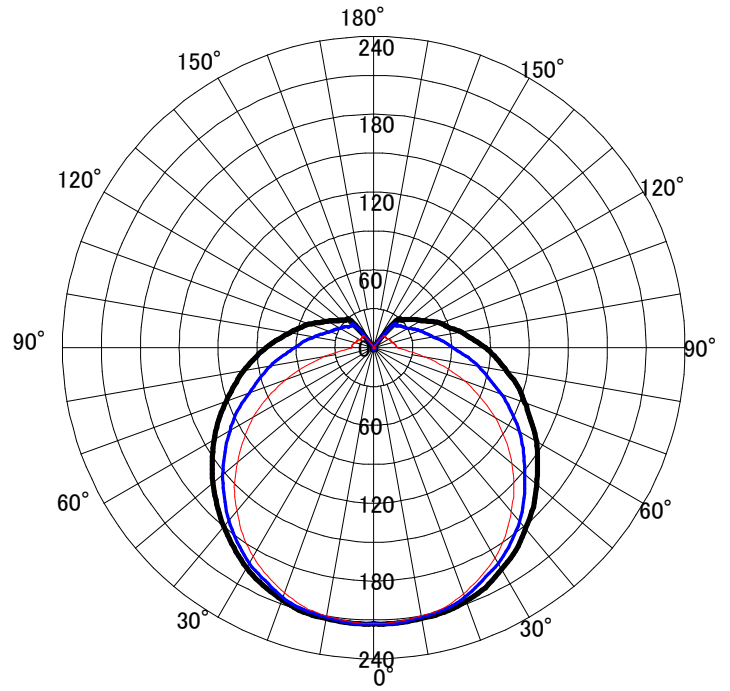

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	27	12	23
-130°	33	12	25
-120°	41	12	30
-110°	53	14	36
-100°	66	16	47
-90°	83	17	61
-80°	102	38	81
-70°	121	72	102
-60°	142	107	128
-50°	162	137	152
-40°	180	164	174
-30°	196	186	192
-20°	207	201	205
-10°	212	210	211
0°	213	213	213

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	213	213	213
10°	212	210	211
20°	208	202	205
30°	197	187	192
40°	182	165	175
50°	164	139	152
60°	145	108	130
70°	124	74	105
80°	104	39	82
90°	86	18	61
100°	69	16	47
110°	55	14	38
120°	42	13	30
130°	34	12	26
140°	27	12	23
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

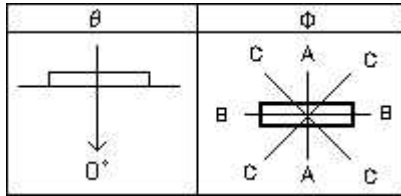

器具効率	最大取付間隔	保守率		
UP 17.2 %	A-A 1.38 H	良	中	否
DN 82.8 %	B-B 1.30 H	83	81	78

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数	照明率 U ( × 0.01 )																							
0.6	41	32	26	39	31	25	39	31	25	38	30	25	37	29	24	35	28	24	27	23	28	24	19	
0.8	52	42	35	48	40	34	50	40	34	47	39	33	46	38	32	44	37	32	36	31	37	32	27	
1.0	60	50	43	56	47	41	58	48	42	54	46	40	53	45	39	50	44	38	42	37	44	38	32	
1.25	69	58	51	63	55	49	66	56	50	61	53	48	60	53	47	57	50	45	49	44	50	45	38	
1.5	75	65	58	68	60	54	72	63	56	66	59	53	66	58	52	61	55	51	54	49	55	51	43	
2.0	85	76	68	76	69	63	81	73	66	73	67	62	74	67	62	68	63	59	62	58	63	59	50	
2.5	91	83	76	81	75	70	87	80	74	78	73	68	79	73	68	73	69	65	68	64	69	65	55	
3.0	97	90	83	85	80	75	92	86	80	82	78	74	84	79	74	77	73	70	72	69	73	70	60	
4.0	104	98	93	90	86	83	99	94	89	88	84	81	90	86	82	82	79	76	79	76	79	76	66	
5.0	109	104	99	93	90	87	103	99	95	91	88	85	94	90	87	85	83	80	82	80	83	80	70	