


品名 :SXC-LE261716N
 定格光束:730lm 消費電力:7.8W
 備考 :LDA8N-G/Sランプ使用時

配光曲線図


— A-A
 — B-B
 — C-C

光度 cd/1000lm

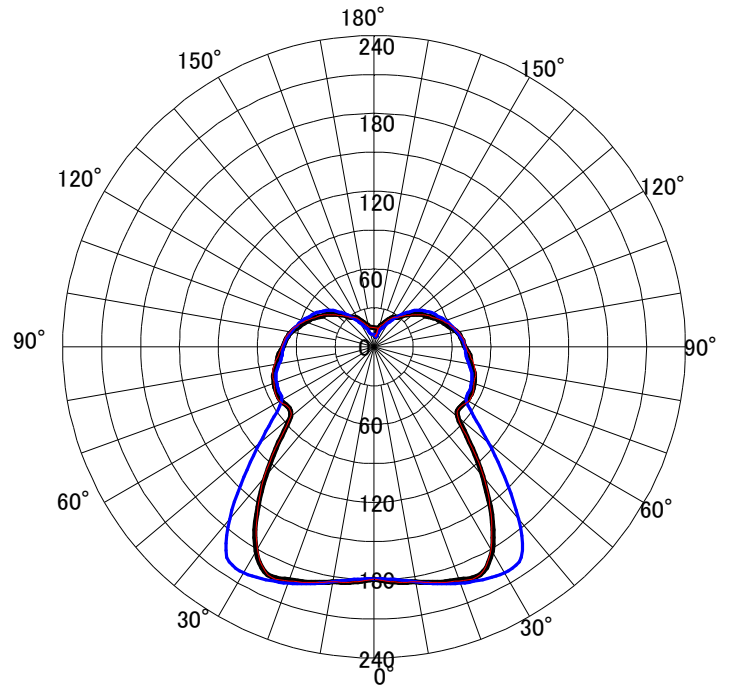

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	9	9	7
-170°	10	10	8
-160°	18	18	14
-150°	25	25	21
-140°	30	30	32
-130°	39	38	44
-120°	47	48	52
-110°	56	57	59
-100°	65	66	65
-90°	70	71	70
-80°	76	78	74
-70°	82	82	80
-60°	83	84	82
-50°	84	84	115
-40°	130	132	173
-30°	182	180	201
-20°	191	192	194
-10°	184	184	184
0°	179	179	179

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	179	179	179
10°	184	184	184
20°	191	192	194
30°	182	180	201
40°	130	132	173
50°	84	84	115
60°	83	84	82
70°	82	82	80
80°	76	78	74
90°	70	71	70
100°	65	66	65
110°	56	57	59
120°	47	48	52
130°	39	38	44
140°	30	30	32
150°	25	25	21
160°	18	18	14
170°	10	10	8
180°	9	9	7

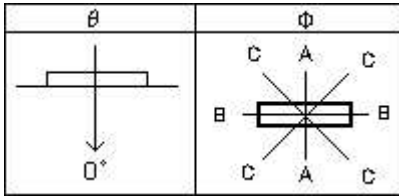

器具効率	最大取付間隔	保守率		
UP 29.7 %	A-A 1.37 H	良	中	否
100.0 %				
DN 70.4 %	B-B 1.38 H	67	63	56

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10				30			10			30			10			30	10	0		
室指数	照明率 U (× 0.01)																							
0.6	40	31	25	38	30	25	38	30	24	37	29	24	34	27	23	33	27	22	25	21	27	22	17	
0.8	50	40	33	47	38	32	47	38	32	44	37	31	42	35	29	40	34	29	31	27	34	29	22	
1.0	57	47	40	53	45	38	54	45	38	50	43	37	48	40	35	45	39	34	36	32	39	34	25	
1.25	64	54	47	59	51	45	61	51	45	56	49	43	54	46	40	50	44	39	41	37	44	39	29	
1.5	70	60	52	63	56	49	66	57	50	60	53	47	58	51	45	54	48	43	45	40	48	43	32	
2.0	78	69	61	70	63	57	73	65	58	67	60	54	64	58	52	60	54	50	51	46	54	50	37	
2.5	84	75	67	74	68	62	79	71	64	71	64	59	69	62	57	64	58	54	55	51	58	54	40	
3.0	89	80	73	78	72	66	83	76	69	74	68	63	72	67	62	67	62	58	58	54	62	58	44	
4.0	95	88	81	82	77	72	89	82	76	78	73	69	77	72	67	71	67	63	63	59	67	63	48	
5.0	99	92	86	85	80	76	92	86	81	81	76	72	80	75	71	73	69	66	66	63	69	66	50	