
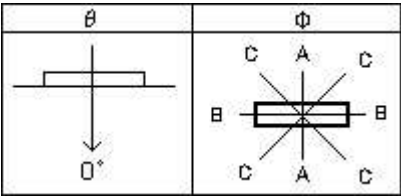


品名 :SXW-LE261716L
定格光束:510lm 消費電力:7.8W
備考 :LDA8L-G/Sランプ使用時

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	26	27	28	0°	90	90	90
-170°	30	26	29	10°	90	96	95
-160°	35	25	30	20°	90	99	98
-150°	38	23	31	30°	86	98	98
-140°	42	19	31	40°	82	97	96
-130°	46	17	32	50°	78	99	95
-120°	52	13	32	60°	76	104	95
-110°	56	12	32	70°	74	105	92
-100°	59	9	32	80°	71	103	88
-90°	62	7	31	90°	65	98	84
-80°	68	9	35	100°	61	96	80
-70°	72	17	41	110°	58	89	78
-60°	76	25	48	120°	53	81	72
-50°	76	35	54	130°	48	72	66
-40°	79	45	62	140°	42	62	59
-30°	84	59	72	150°	38	53	52
-20°	89	72	80	160°	35	45	44
-10°	90	84	88	170°	31	37	35
0°	90	90	90	180°	28	29	29

配光曲線図

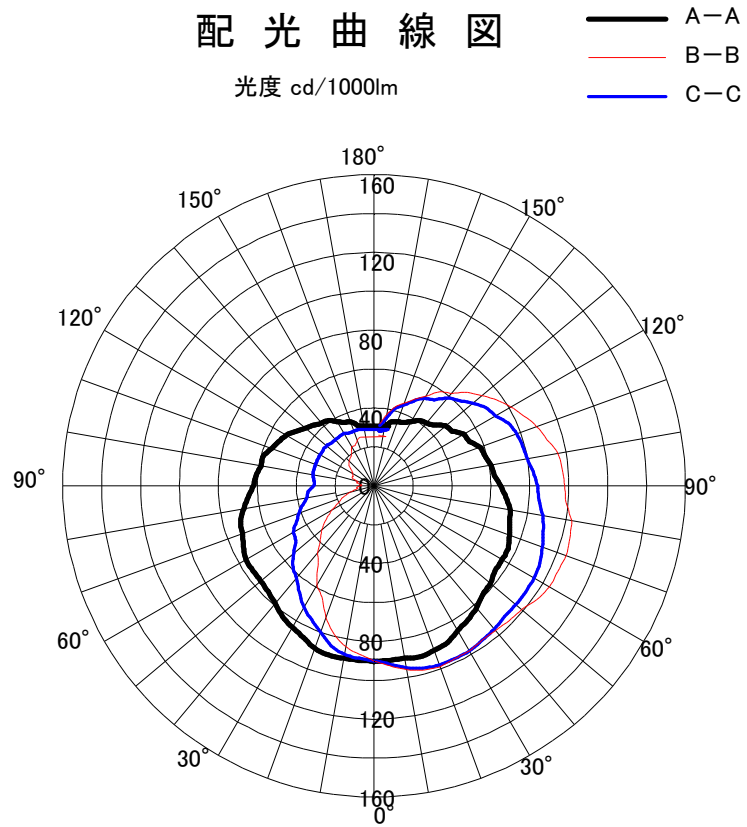

器具効率	最大取付間隔	保守率		
UP 41.1 % 100.0 % DN 58.9 %	A-A 1.43 H B-B 1.63 H	良	中	否
		67	63	56

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		35	25	19	33	25	19	32	24	18	31	23	18	27	20	16	26	20	16	17	13	20	16	08	
0.8		43	33	26	41	32	26	40	31	25	38	30	24	34	27	21	32	26	21	22	18	26	21	12	
1.0		51	40	32	47	38	31	47	37	30	44	35	29	39	32	26	37	31	25	27	22	31	25	15	
1.25		58	47	39	53	44	37	53	43	36	49	41	35	45	37	31	42	35	30	31	26	35	30	17	
1.5		63	52	44	57	49	42	58	48	41	53	45	39	49	41	35	45	39	34	34	29	39	34	20	
2.0		71	61	53	64	56	49	65	56	49	59	52	46	55	47	42	51	45	40	39	35	45	40	24	
2.5		77	67	59	68	60	54	71	62	55	63	56	50	59	52	46	54	49	44	43	38	49	44	26	
3.0		82	72	64	72	64	58	75	67	60	67	60	55	62	56	50	57	52	47	46	42	52	47	29	
4.0		88	79	72	76	70	64	80	73	66	71	65	60	67	61	56	61	56	52	50	46	56	52	32	
5.0		92	84	77	79	73	67	84	77	71	73	68	63	70	64	59	63	59	55	53	49	59	55	34	