



型番：MVB4103/69N5-NX8 器具全光束 6900lm

光源：DLU46905/N-NX8

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	7	8	7	0°	298	298	298
-170°	8	8	8	10°	294	292	292
-160°	8	8	8	20°	280	276	276
-150°	6	7	6	30°	258	251	254
-140°	5	6	6	40°	228	214	222
-130°	10	6	6	50°	191	178	184
-120°	12	6	9	60°	150	134	142
-110°	15	6	12	70°	100	84	99
-100°	24	7	16	80°	68	36	60
-90°	42	8	30	90°	42	8	30
-80°	68	36	60	100°	24	7	16
-70°	100	84	99	110°	15	6	12
-60°	150	134	142	120°	12	6	9
-50°	191	178	184	130°	10	6	6
-40°	228	214	222	140°	5	6	6
-30°	258	251	254	150°	6	7	6
-20°	280	276	276	160°	8	8	8
-10°	294	292	292	170°	8	8	8
0°	298	298	298	180°	7	8	7

配光曲線図

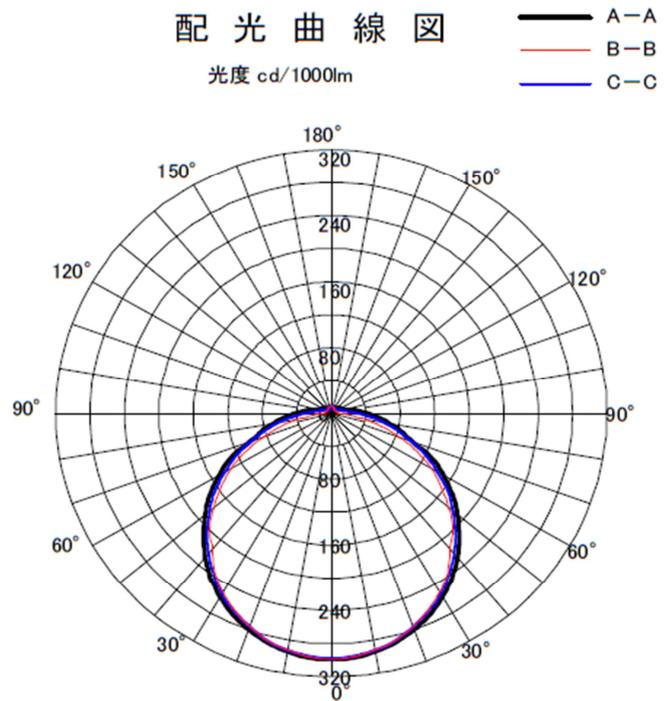

器具効率		最大取付間隔		保守率		
UP	6.9 %	A-A	1.29 H	良	中	否
	100.0 %					
DN	93.1 %	B-B	1.25 H	83	81	78

反射率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30		10		30		10		30		10		30		10		30		10		0			
室指数		照明率 U (× 0.01)																							
0.6	45	36	30	43	35	29	44	35	30	42	34	29	42	34	29	40	33	29	33	28	33	29	26		
0.8	56	47	40	53	45	39	55	46	39	52	44	39	52	44	38	50	43	38	43	37	43	38	34		
1.0	65	55	48	60	53	47	63	54	48	59	52	46	60	52	46	57	50	45	50	45	50	45	41		
1.25	74	64	57	68	60	54	72	63	56	66	59	54	67	60	54	64	57	53	57	52	57	53	48		
1.5	80	71	64	73	66	60	78	69	62	71	65	59	73	66	60	68	63	58	63	58	63	58	53		
2.0	90	81	74	80	74	69	87	79	73	79	73	68	81	75	70	75	71	66	71	67	71	66	61		
2.5	96	88	82	85	80	75	93	86	80	83	78	74	87	81	76	80	76	72	76	73	76	72	66		
3.0	101	94	88	89	84	80	98	91	86	87	83	79	91	86	82	84	80	77	81	78	80	77	71		
4.0	108	102	97	93	90	86	104	99	94	92	88	85	97	92	89	88	85	83	87	84	85	83	76		
5.0	112	107	103	96	93	90	108	103	99	94	92	89	100	96	93	91	89	86	90	88	89	86	80		