



MRB15028W2/W-8

○諸特性


| 光源 | | LED1450lm W | | | | |
|----------------|------|-------------|-------|--------|-------|-------|
| 最大 取付 間隔 | 高さ | 1.5m | 2.0m | 2.5m | 3.0m | |
| | A-A | 1.78m | 2.38m | 2.97m | 3.57m | |
| | B-B | 1.78m | 2.38m | 2.97m | 3.57m | |
| 器具効率 | 上方光束 | 下方光束 | | 計 | | |
| | 0.0% | 100.0% | | 100.0% | | |
| 保守率 | 良い | 0.810 | 普通 | 0.770 | 悪い | 0.680 |



○配光曲線図 (cd/1000lm)

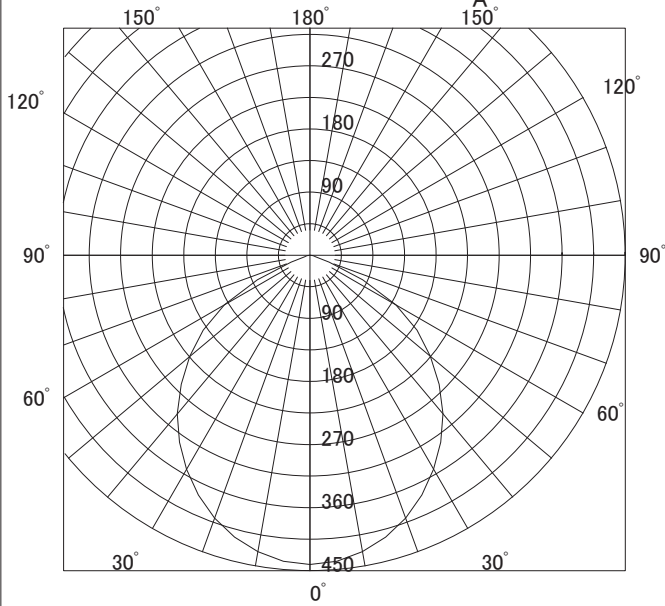

○直射水平面照度

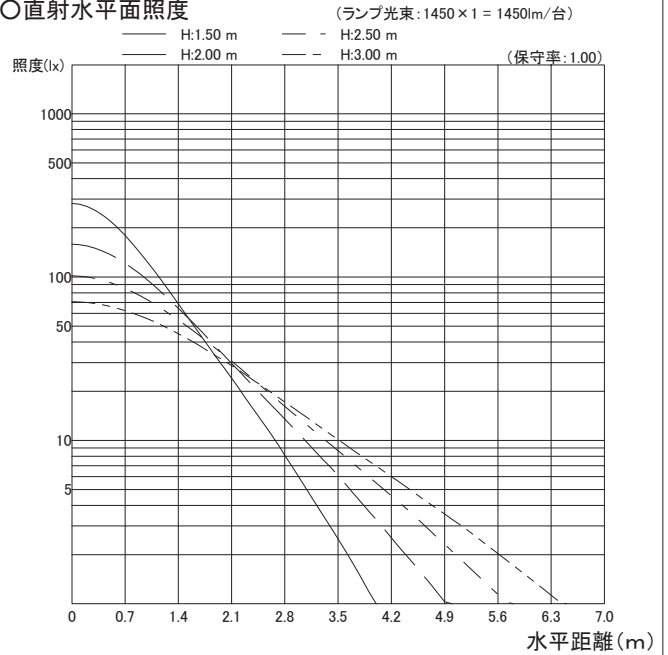

作業面照明率(×0.01)

| 反射率(%) | | | 室指数 | | | | | | | | | | | | |
|--------|----|----|-----|-----|-----|-----|------|-----|-----|-----|-----|-----|-----|-----|------|
| 天井 | 壁 | 床 | 0.4 | 0.6 | 0.8 | 1.0 | 1.25 | 1.5 | 2.0 | 2.5 | 3.0 | 4.0 | 5.0 | 7.0 | 10.0 |
| 80 | 70 | 30 | 48 | 67 | 78 | 87 | 95 | 100 | 107 | 112 | 115 | 119 | 122 | 124 | 126 |
| | | 10 | 45 | 62 | 71 | 78 | 85 | 88 | 94 | 97 | 99 | 101 | 103 | 104 | 106 |
| | 50 | 30 | 35 | 53 | 64 | 74 | 83 | 89 | 98 | 104 | 108 | 113 | 117 | 120 | 123 |
| | | 10 | 34 | 50 | 60 | 68 | 76 | 81 | 87 | 92 | 95 | 98 | 100 | 102 | 104 |
| 70 | 30 | 30 | 28 | 45 | 55 | 65 | 75 | 81 | 90 | 97 | 102 | 108 | 112 | 117 | 121 |
| | | 10 | 27 | 43 | 53 | 61 | 70 | 75 | 82 | 88 | 91 | 95 | 98 | 100 | 103 |
| | 50 | 30 | 47 | 65 | 75 | 84 | 92 | 97 | 104 | 109 | 111 | 115 | 117 | 120 | 122 |
| | | 10 | 44 | 60 | 69 | 76 | 83 | 87 | 92 | 96 | 98 | 100 | 102 | 103 | 104 |
| 50 | 30 | 30 | 34 | 52 | 63 | 72 | 82 | 87 | 95 | 101 | 105 | 110 | 113 | 116 | 119 |
| | | 10 | 33 | 50 | 59 | 68 | 76 | 80 | 87 | 91 | 94 | 97 | 99 | 101 | 103 |
| | 50 | 30 | 27 | 44 | 53 | 62 | 72 | 77 | 85 | 91 | 95 | 100 | 103 | 107 | 110 |
| | | 10 | 27 | 43 | 52 | 60 | 69 | 73 | 81 | 86 | 89 | 92 | 95 | 98 | 100 |
| 30 | 30 | 27 | 43 | 52 | 61 | 70 | 75 | 82 | 88 | 91 | 95 | 98 | 101 | 103 | |
| | 10 | 26 | 42 | 51 | 60 | 68 | 72 | 79 | 84 | 87 | 91 | 93 | 96 | 98 | |
| 0 | 0 | 30 | 22 | 38 | 47 | 55 | 64 | 69 | 76 | 82 | 85 | 89 | 92 | 95 | 97 |
| | | 10 | 21 | 36 | 45 | 53 | 62 | 67 | 74 | 79 | 82 | 86 | 89 | 92 | 94 |