



MRB06028W2/W-8

○諸特性

光源		LED560lm W				
最大 取付 間隔	高さ	1.5m	2.0m	2.5m	3.0m	
	A-A	1.82m	2.42m	3.02m	3.63m	
	B-B	1.82m	2.42m	3.02m	3.63m	
器具効率	上方光束	下方光束		計		
	0.0%	100.0%		100.0%		
保守率	良い	0.810	普通	0.770	悪い	0.680




○配光曲線図 (cd/1000lm)

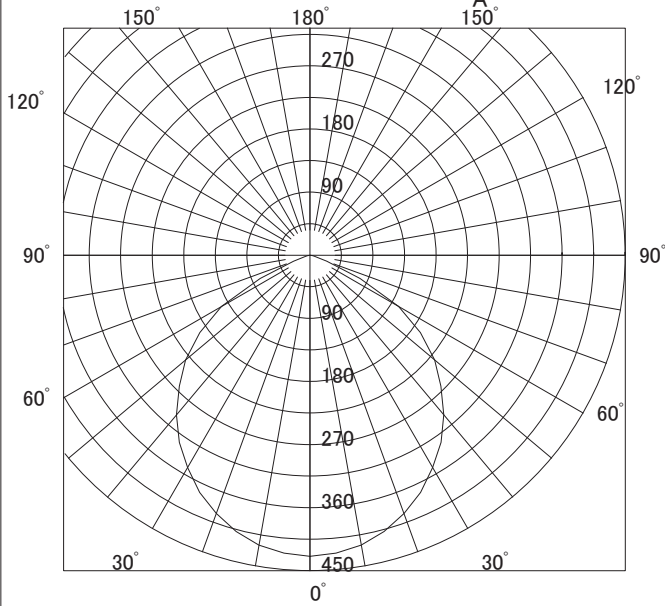

○直射水平面照度

(ランプ光束: 560 × 1 = 560lm/台)

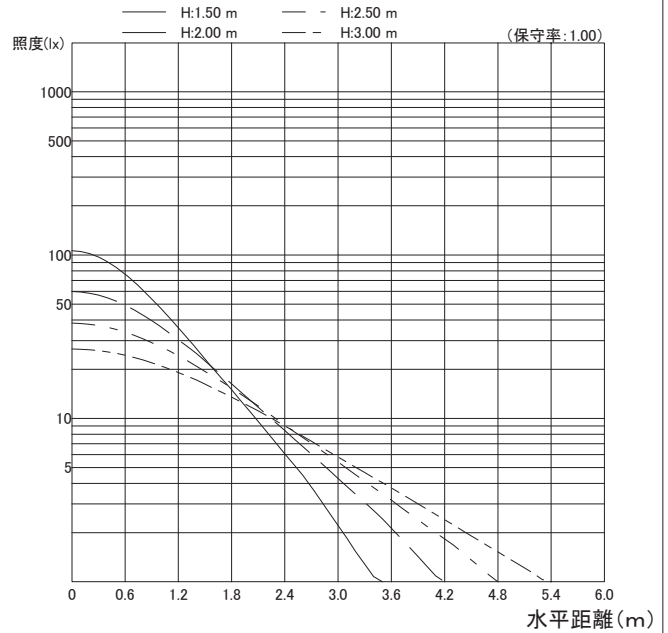

作業面照明率(×0.01)

反射率(%)			室指数												
天井	壁	床	0.4	0.6	0.8	1.0	1.25	1.5	2.0	2.5	3.0	4.0	5.0	7.0	10.0
80	70	30	48	66	77	87	95	100	107	112	115	119	121	124	126
		10	45	61	70	78	85	88	93	97	99	101	103	104	106
	50	30	34	53	64	73	83	89	98	104	108	113	116	120	123
		10	33	50	60	68	76	81	87	92	95	98	100	102	104
70	30	30	27	44	55	64	75	81	90	97	102	108	112	117	121
		10	27	43	52	61	70	75	82	88	91	95	97	100	103
	50	30	46	65	75	84	92	97	104	109	111	115	117	120	122
		10	44	60	69	76	83	87	92	96	97	100	101	103	104
50	30	30	34	52	62	72	81	87	95	101	105	110	113	116	119
		10	33	49	59	67	75	80	86	91	94	97	99	101	103
	50	30	27	44	54	64	74	79	89	95	99	105	109	113	117
		10	26	43	52	61	70	74	82	87	90	94	97	99	102
30	30	30	33	50	60	69	78	83	91	96	99	104	106	109	111
		10	32	48	58	66	74	78	85	89	92	95	97	99	101
	30	30	27	43	53	62	72	77	85	91	95	100	103	107	110
		10	26	42	51	60	69	73	81	86	89	92	95	98	100
0	0	30	26	43	52	61	70	75	82	88	91	95	98	101	103
		10	26	42	51	59	68	72	79	84	87	91	93	96	98
0	0	0	20	36	45	53	62	67	74	79	82	86	89	92	94