



配光曲線図

— A-A  
 — B-B  
 — C-C

光度 cd/1000lm

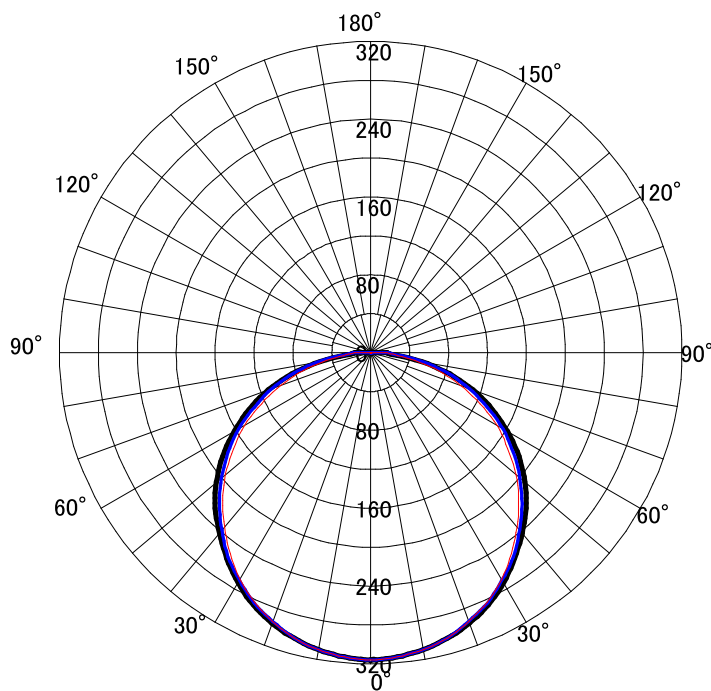

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	16	15	16
-80°	53	46	56
-70°	112	98	108
-60°	162	150	157
-50°	207	195	200
-40°	242	234	238
-30°	273	269	270
-20°	296	294	294
-10°	310	310	310
0°	316	316	316
10°	310	310	310
20°	296	294	294
30°	273	269	270
40°	242	234	238
50°	207	195	200
60°	162	150	157
70°	112	98	108
80°	53	46	56
90°	16	15	16

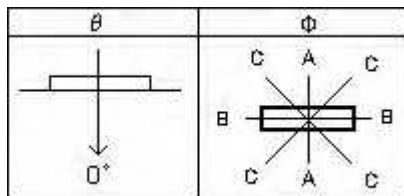

器具効率		最大取付間隔		保守率		
UP	0 %	A-A	1.28 H	良	中	否
	100 %					
DN	100 %	B-B	1.26 H	83	81	77

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数		照明率 U ( × 0.01 )																						
0.6		45	36	30	43	35	30	44	36	30	42	35	30	43	35	30	41	34	29	34	29	34	29	27
0.8		57	47	40	53	45	39	55	46	40	52	45	39	53	45	40	51	44	39	44	39	44	39	36
1.0		66	56	49	61	53	47	64	55	48	60	53	47	61	54	48	58	52	46	52	47	52	46	44
1.25		74	65	57	68	61	55	72	64	57	67	60	55	69	62	56	65	59	54	60	55	59	54	51
1.5		81	71	64	73	66	61	79	70	63	72	66	60	75	68	62	70	64	60	65	60	64	60	57
2.0		90	82	75	81	75	70	88	80	74	80	74	69	83	77	72	77	72	68	74	69	72	68	65
2.5		97	89	83	85	80	76	94	87	81	84	79	75	89	83	78	82	78	74	80	76	78	74	71
3.0		102	95	89	89	85	80	99	93	87	88	84	80	93	88	84	86	82	79	84	81	82	79	75
4.0		108	103	97	94	90	87	105	100	95	93	89	86	99	95	91	90	87	85	90	87	87	85	81
5.0		112	107	103	96	93	90	109	104	100	95	92	90	102	98	95	93	90	88	93	91	90	88	84