


型番: DRGE30H12S/N-PJX8


### 配光曲線図

光度 cd/1000lm

— A-A  
— B-B  
— C-C

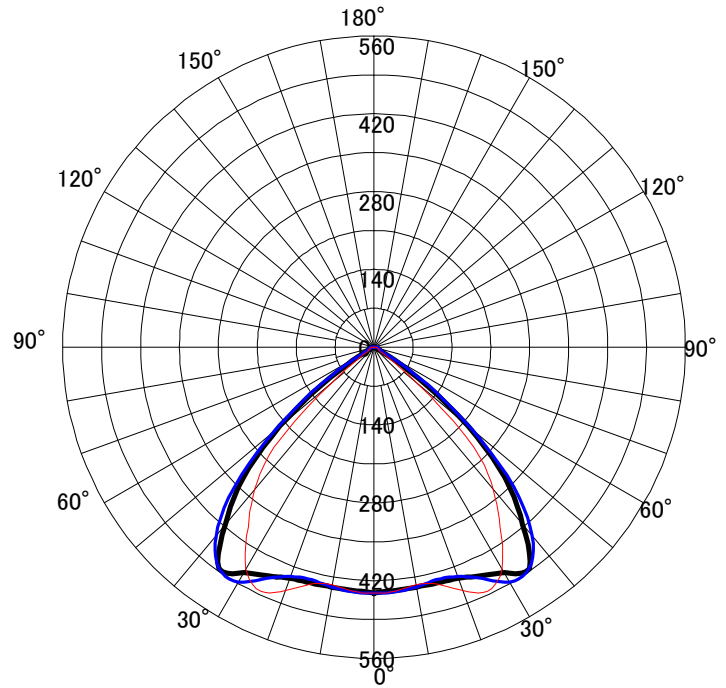

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	3	5	6
-80°	5	6	7
-70°	7	8	10
-60°	23	12	30
-50°	221	103	230
-40°	416	333	442
-30°	468	461	488
-20°	442	466	439
-10°	438	434	438
0°	442	442	442
10°	438	434	438
20°	442	466	439
30°	468	461	488
40°	416	333	442
50°	221	103	230
60°	23	12	30
70°	7	8	10
80°	5	6	7
90°	3	5	6

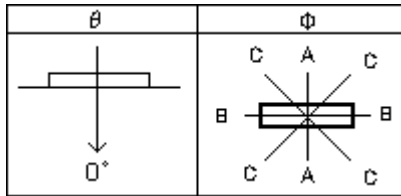

器具効率		最大取付間隔		保守率		
UP	0.1 %	A-A	1.55 H	良	中	否
	100.0 %					
DN	99.9 %	B-B	1.38 H	83	81	79

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
		床	30		10		30		10		30		10		30		10		30		10		0	
室指数		照明率 U ( × 0.01 )																						
0.6		58	50	45	56	49	44	58	50	45	55	49	44	56	49	45	54	48	44	49	44	48	44	42
0.8		73	65	59	68	62	58	71	64	59	67	62	57	69	63	58	66	61	57	62	58	61	57	55
1.0		82	74	69	76	71	66	81	74	68	76	70	66	78	72	67	74	70	66	71	67	70	66	64
1.25		90	83	78	83	78	74	89	82	77	82	78	74	86	80	76	81	77	73	78	74	77	73	71
1.5		96	90	84	87	83	80	94	88	83	87	83	79	91	86	81	85	82	79	83	80	82	79	76
2.0		105	99	94	93	90	87	102	97	92	93	89	87	98	93	90	91	88	86	90	87	88	86	83
2.5		110	105	100	97	94	92	107	103	99	96	94	91	102	98	95	94	92	90	95	92	92	90	87
3.0		114	109	105	100	97	95	111	107	103	99	96	94	105	102	99	97	95	93	98	96	95	93	90
4.0		118	115	111	102	101	99	115	112	109	101	100	98	109	106	104	100	98	97	102	100	98	97	93
5.0		121	118	116	104	103	102	118	115	113	103	102	101	111	109	107	101	100	99	104	102	100	99	95