


配光曲線図


— A-A
 — B-B
 — C-C

光度 cd/1000lm

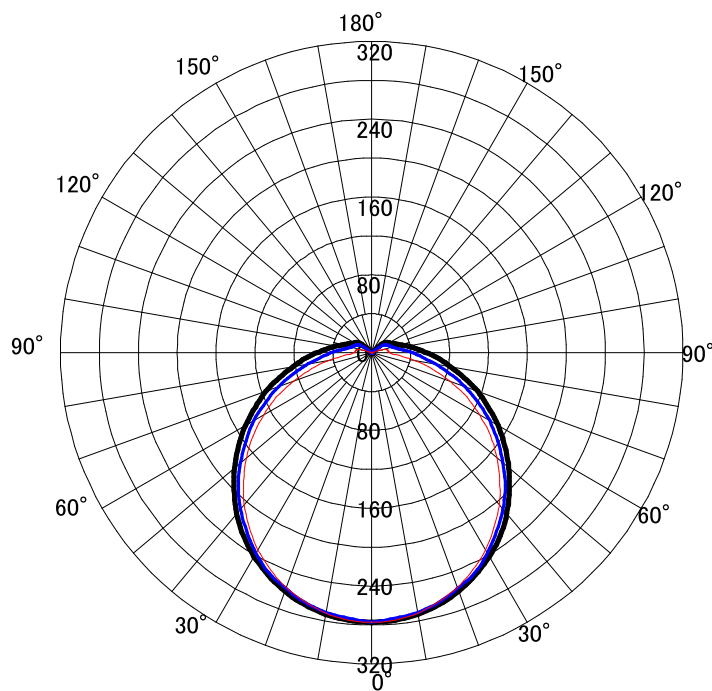

光度(cd/1000lm)			
	A-A	B-B	C-C
-180°	0	0	0
-170°	0	0	0
-160°	0	0	0
-150°	0	0	0
-140°	0	0	0
-130°	13	0	0
-120°	20	0	16
-110°	26	0	20
-100°	38	16	26
-90°	56	18	42
-80°	82	44	66
-70°	116	85	102
-60°	150	128	140
-50°	184	168	176
-40°	216	204	210
-30°	242	234	238
-20°	261	257	258
-10°	273	272	271
0°	277	277	277

光度(cd/1000lm)			
	A-A	B-B	C-C
0°	277	277	277
10°	273	272	271
20°	261	257	258
30°	242	234	238
40°	216	204	210
50°	184	168	176
60°	150	128	140
70°	116	85	102
80°	82	44	66
90°	56	18	42
100°	38	16	26
110°	26	0	20
120°	20	0	16
130°	13	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

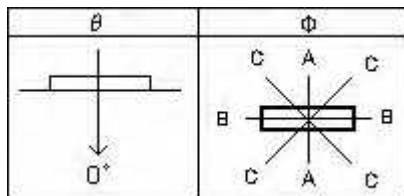

器具効率	最大取付間隔		保守率		
	UP 8.2 % 100.0 % DN 91.7 %	A-A 1.30 H	良	中	否
	B-B 1.25 H	83	81	77	

反射率 (%)	天井	80						70						50						30				0
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0
	床	30		10		30		10		30		10		30		10		30		10		0		
室指数		照明率 U (× 0.01)																						
0.6	44	35	28	42	34	28	43	34	28	41	33	28	40	33	27	39	32	27	32	27	32	27	24	
0.8	55	45	38	51	43	37	53	44	38	50	42	37	50	42	37	48	41	36	41	36	41	36	32	
1.0	63	54	46	59	51	45	62	52	46	58	50	44	58	50	44	55	48	43	48	43	48	43	39	
1.25	72	62	55	66	58	52	70	61	54	64	57	52	65	58	52	62	55	50	55	50	55	50	46	
1.5	78	69	61	71	64	58	76	67	60	70	63	57	71	64	58	66	61	56	60	55	61	56	51	
2.0	88	79	72	79	72	67	85	77	70	77	71	66	79	73	67	74	68	64	69	64	68	64	58	
2.5	95	87	80	84	78	73	91	84	78	82	76	72	85	79	74	78	74	70	74	70	74	70	64	
3.0	100	93	87	88	83	78	96	90	84	86	81	77	89	84	79	82	78	75	79	75	78	75	68	
4.0	107	101	95	92	88	85	103	97	92	90	87	84	95	91	87	87	84	81	85	82	84	81	74	
5.0	111	106	101	95	92	89	107	102	98	93	90	88	98	95	92	90	87	85	88	86	87	85	77	