
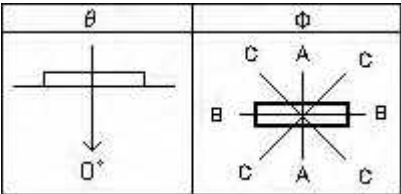


品名 :HWDG22001
定格光束:1,000lm 消費電力:10W

配光曲線図
光度 cd/1000lm

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180 °	8	8	6	0 °	195	195	195
-170 °	8	8	6	10 °	207	191	200
-160 °	7	8	6	20 °	214	180	200
-150 °	7	7	6	30 °	200	159	190
-140 °	7	7	6	40 °	193	128	169
-130 °	7	7	6	50 °	190	93	148
-120 °	9	7	7	60 °	183	59	126
-110 °	11	7	9	70 °	167	30	108
-100 °	13	7	14	80 °	140	13	89
-90 °	16	7	25	90 °	110	7	72
-80 °	29	13	41	100 °	90	7	56
-70 °	62	29	53	110 °	77	7	44
-60 °	73	57	67	120 °	63	7	24
-50 °	86	90	86	130 °	21	7	7
-40 °	102	127	111	140 °	7	7	7
-30 °	129	156	137	150 °	7	7	6
-20 °	158	177	164	160 °	7	8	6
-10 °	184	191	188	170 °	7	8	6
0 °	195	195	195	180 °	7	8	6

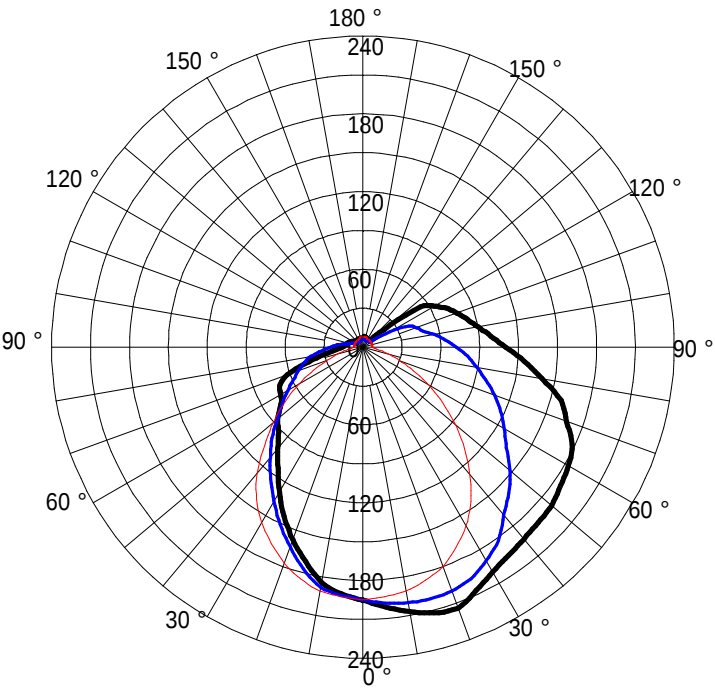

器具効率	最大取付間隔	保守率		
UP 18.6 % 99.9 % DN 81.3 %	A-A 1.52 H B-B 1.21 H	良	中	否
		72	68	64

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		41	32	26	39	31	26	40	31	26	38	31	25	37	30	24	35	29	24	28	23	29	24	20	
0.8		53	43	36	49	41	35	51	42	35	48	40	34	47	39	33	44	38	33	37	32	38	33	27	
1.0		62	52	45	57	49	43	59	50	44	55	48	42	55	47	41	52	45	40	44	39	45	40	34	
1.25		71	62	54	65	58	52	68	59	53	63	56	51	63	55	50	59	53	48	52	47	53	48	41	
1.5		78	69	62	71	64	59	75	67	60	69	62	57	69	62	56	64	59	54	57	53	59	54	47	
2.0		89	81	75	80	74	69	85	78	72	77	72	68	78	72	68	72	68	64	67	63	68	64	56	
2.5		97	90	84	86	81	77	92	86	81	83	79	75	84	80	75	78	74	71	73	70	74	71	62	
3.0		103	98	93	91	87	84	99	94	89	88	85	82	90	86	83	83	80	78	79	77	80	78	68	
4.0		112	108	104	97	95	93	107	103	100	94	92	90	97	95	92	89	87	86	87	85	87	86	75	
5.0		117	114	111	100	99	98	111	109	107	98	97	96	101	100	98	92	92	91	92	90	92	91	80	