

品名 :XM-LE17203L
定格光束:590lm 消費電力:8.5W



光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180 °	11	11	11	0 °	166	166	166
-170 °	11	11	11	10 °	166	165	166
-160 °	16	11	14	20 °	165	165	166
-150 °	22	11	17	30 °	160	161	162
-140 °	28	11	24	40 °	150	151	154
-130 °	34	11	32	50 °	136	139	142
-120 °	42	14	42	60 °	118	122	128
-110 °	50	28	54	70 °	100	103	107
-100 °	55	50	61	80 °	78	80	85
-90 °	62	64	68	90 °	62	64	68
-80 °	78	80	85	100 °	55	50	61
-70 °	100	103	107	110 °	50	28	54
-60 °	118	122	128	120 °	42	14	42
-50 °	136	139	142	130 °	34	11	32
-40 °	150	151	154	140 °	28	11	24
-30 °	160	161	162	150 °	22	11	17
-20 °	165	165	166	160 °	16	11	14
-10 °	166	165	166	170 °	11	11	11
0 °	166	166	166	180 °	11	11	11

配光曲線図
光度 cd/1000lm

A - A

B - B

C - C

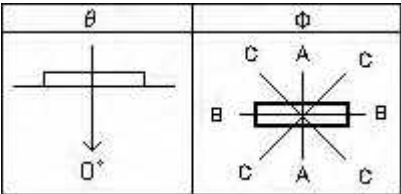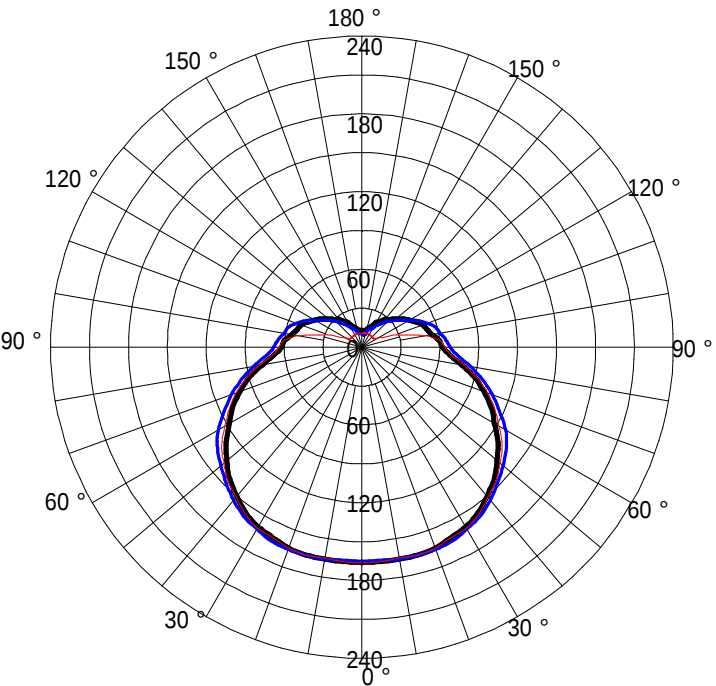

器具効率	最大取付間隔	保守率		
UP 22.7 % 100.1 % DN 77.4 %	A-A 1.44 H B-B 1.44 H	良	中	否
		67	63	60

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		38	29	23	36	28	22	37	28	22	35	27	22	33	26	21	32	25	20	24	19	25	20	16	
0.8		48	38	31	45	37	30	46	37	30	43	35	29	42	34	28	40	33	27	31	26	33	27	21	
1.0		56	46	38	52	43	37	53	44	37	50	42	36	48	40	34	46	39	33	37	32	39	33	26	
1.25		64	54	46	59	50	44	61	51	44	56	48	42	55	47	41	51	45	39	43	37	45	39	31	
1.5		70	60	52	64	55	49	66	57	50	61	53	47	59	52	46	56	49	44	47	42	49	44	35	
2.0		79	69	61	71	63	57	75	66	59	68	61	55	67	60	54	62	56	51	54	49	56	51	41	
2.5		85	76	68	75	68	63	81	72	65	72	66	60	72	65	59	66	61	56	59	54	61	56	45	
3.0		90	82	75	79	73	67	85	78	71	76	70	65	76	70	65	70	65	61	63	58	65	61	49	
4.0		97	89	83	84	79	74	91	85	79	81	76	71	81	76	71	74	70	66	68	64	70	66	54	
5.0		101	94	88	87	82	78	95	89	84	83	79	75	84	79	75	77	73	70	71	68	73	70	56	