



品名 :SXM-LE261716N
定格光束:730lm 消費電力:7.8W
備考 :LDA8N-G/Sランプ使用時

配光曲線図
光度 cd/1000lm

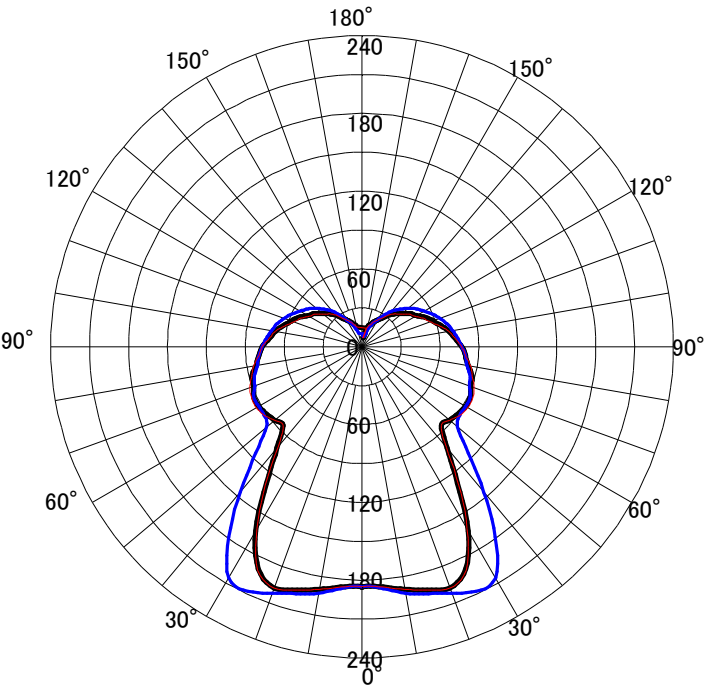

光度(cd/1000lm)				光度(cd/1000lm)			
	A-A	B-B	C-C		A-A	B-B	C-C
-180°	8	8	8	0°	185	185	185
-170°	9	9	9	10°	190	190	193
-160°	18	18	16	20°	198	198	202
-150°	24	24	24	30°	164	162	206
-140°	32	32	36	40°	102	101	146
-130°	40	39	46	50°	88	88	96
-120°	48	47	55	60°	92	94	92
-110°	58	56	64	70°	89	92	88
-100°	68	68	71	80°	83	85	82
-90°	77	77	77	90°	77	77	77
-80°	83	85	82	100°	68	68	71
-70°	89	92	88	110°	58	56	64
-60°	92	94	92	120°	48	47	55
-50°	88	88	96	130°	40	39	46
-40°	102	101	146	140°	32	32	36
-30°	164	162	206	150°	24	24	24
-20°	198	198	202	160°	18	18	16
-10°	190	190	193	170°	9	9	9
0°	185	185	185	180°	8	8	8

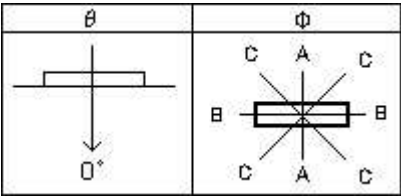

器具効率	最大取付間隔	保守率		
UP 30.9 % 100.0 % DN 69.1 %	A-A 1.22 H B-B 1.24 H	良	中	否
		67	63	56

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0. 01)																							
0.6		40	31	25	38	30	25	38	30	24	36	29	24	34	27	22	33	26	22	24	20	26	22	16	
0.8		49	39	32	46	38	32	46	37	31	44	36	30	41	34	28	39	33	28	30	26	33	28	20	
1.0		56	46	39	52	44	37	53	44	37	49	42	36	47	39	34	44	38	33	35	30	38	33	24	
1.25		63	53	46	58	50	44	60	50	43	55	48	42	52	45	39	49	43	38	40	35	43	38	28	
1.5		69	59	51	63	55	48	65	56	49	59	52	46	57	49	44	53	47	42	44	39	47	42	31	
2.0		78	68	60	69	62	56	73	64	57	66	59	53	63	56	51	59	53	48	50	45	53	48	36	
2.5		83	74	67	74	67	61	78	70	63	70	64	58	68	61	56	63	57	53	54	49	57	53	39	
3.0		88	80	73	77	71	66	82	75	68	73	68	63	72	66	61	66	61	57	57	53	61	57	42	
4.0		95	87	80	82	76	72	88	82	76	78	73	68	76	71	67	70	66	62	62	59	66	62	46	
5.0		99	92	86	85	80	75	92	86	80	80	76	72	79	75	71	72	69	65	65	62	69	65	49	