



型番: DRDE13H01(TB)S/N-PJ8

配光曲線図

光度 cd/1000lm

— A-A
— B-B
— C-C

光度(cd/1000lm)			
	A-A	B-B	C-C
-90°	13	13	13
-80°	21	21	22
-70°	66	61	66
-60°	137	129	135
-50°	204	200	202
-40°	258	255	257
-30°	295	292	294
-20°	320	318	319
-10°	335	334	334
0°	340	340	340
10°	337	337	337
20°	325	326	325
30°	301	303	302
40°	267	270	268
50°	216	219	214
60°	150	150	151
70°	82	77	79
80°	27	28	27
90°	15	14	15

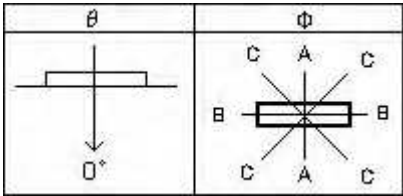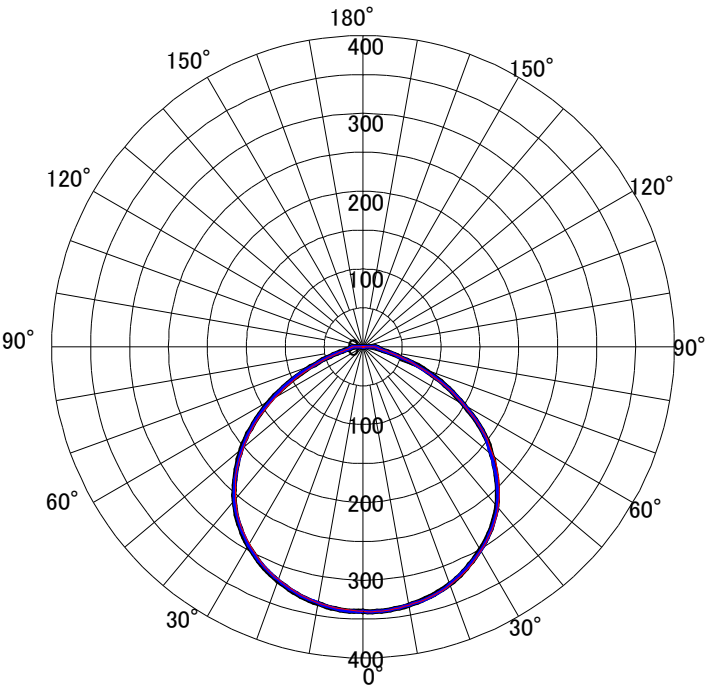

器具効率	最大取付間隔	保守率		
UP 0.4 %	A-A 1.31 H	良	中	否
DN 99.6 %	B-B 1.32 H	83	81	79

反 射 率 (%)	天井	80						70						50						30				0	
	壁	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	30	10	30	10	0	
	床	30			10			30			10			30			10			30		10		0	
室 指 数		照 明 率 U (× 0.01)																							
0.6		48	39	33	45	38	32	47	38	32	45	37	32	45	38	32	44	37	32	37	32	37	32	30	
0.8		60	50	43	56	48	42	58	50	43	55	48	42	56	48	43	54	47	42	47	42	47	42	40	
1.0		69	59	52	64	56	51	67	58	52	63	56	50	65	57	51	61	55	50	56	50	55	50	47	
1.25		78	68	61	71	64	58	76	67	61	70	63	58	72	65	59	68	62	58	63	58	62	58	55	
1.5		84	75	68	76	70	64	82	74	67	75	69	64	78	71	66	73	68	63	69	64	68	63	60	
2.0		93	85	78	83	78	73	91	83	77	82	77	72	86	80	75	80	75	71	77	73	75	71	68	
2.5		99	92	86	88	83	78	97	90	84	87	82	78	91	86	81	85	80	77	82	78	80	77	73	
3.0		104	97	91	91	87	83	101	95	90	90	86	82	95	90	86	88	84	81	86	83	84	81	77	
4.0		110	104	99	95	92	88	107	101	97	94	91	88	100	96	92	92	89	86	91	88	89	86	82	
5.0		114	109	104	98	94	92	110	106	101	96	94	91	103	100	96	94	92	89	95	92	92	89	85	